

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number  
WO 00/75925 A1

- (51) International Patent Classification<sup>7</sup>: G11B 20/00, H04N 5/913, 7/26
- (21) International Application Number: PCT/US00/15671
- (22) International Filing Date: 8 June 2000 (08.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/138,171 8 June 1999 (08.06.1999) US
- (71) Applicant: INTERTRUST TECHNOLOGIES CORP. [US/US]; 4750 Patrick Henry, Santa Clara, CA 95054 (US).
- (72) Inventor: SERRET-AVILA, Xavier; Apartment 9211, 900 Pepper Tree Lane, Santa Clara, CA 95051 (US).
- (74) Agents: GARRETT, Arthur, S. et al.; Finnegan, Henderson, Farabow, Garrett & Dunner, L.L.P., 1300 I Street, N.W., Washington, DC 20005-3315 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.  
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEMS FOR PROTECTING DATA USING DIGITAL SIGNATURE AND WATERMARK

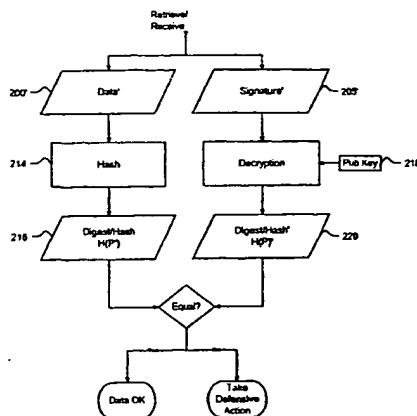

(57) Abstract: A relatively hard-to-remove, easy-to-detect, strong watermark is inserted in a data signal. The data signal is divided into a sequence of blocks, and a digital signature for each block is embedded in the signal via a watermark. When a user attempts to access or use a portion of the data signal, the signal is checked for the presence of a watermark containing the digital signature for the desired portion of the signal. If the watermark is found, the digital signature is extracted and used to verify the authenticity of the desired portion of the signal. If the signature-containing watermark is not found, the signal is checked for the presence of the strong watermark. If the strong watermark is found, further use of the signal is inhibited, as the presence of the strong watermark, in combination with the absence or corruption of the signature-containing watermark, provides evidence that the signal has been improperly modified. If, on the other hand, the strong mark is not found, further use of the data signal can be allowed.

## METHOD AND SYSTEMS FOR PROTECTING DATA USING DIGITAL SIGNATURE AND WATERMARK

**RELATED APPLICATIONS**

This application claims priority from U.S. Provisional Patent Application  
5 Serial No. 60/138,171, entitled "Method and System for Encoding Data," filed June 8, 1999, which is hereby incorporated by reference in its entirety.

**COPYRIGHT AUTHORIZATION**

A portion of the disclosure of this patent document contains material which is  
subject to copyright protection. The copyright owner has no objection to the facsimile  
10 reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

**FIELD OF THE INVENTION**

The present invention relates generally to systems and methods for protecting  
15 data from unauthorized use or modification. More specifically, the present invention relates to systems and methods for using digital signature and watermarking techniques to control access to, and use of, digital or electronic data.

**BACKGROUND OF THE INVENTION**

Recent advances in electronic communication, storage, and processing  
20 technology have led to an increasing demand for digital content. Today large quantities of information can be readily encoded and stored on a variety of compact and easily-transportable media, and can be conveniently accessed using high-speed connections to networks such as the Internet.

However, despite the demand for digital content, and the availability of  
25 technology that enables its efficient creation and distribution, the threat of piracy has kept the market for digital goods from reaching its full potential, for while one of the great advantages of digital technology is that it enables information to be perfectly reproduced at little cost, this is also a great threat to the rights and interests of artists, content producers, and other copyright holders who often expend substantial amounts  
30 of time and money to create original works. As a result, artists, producers, and copyright owners are often reluctant to distribute their works in electronic form—or are forced to distribute their works at inflated prices to account for piracy—thus limiting the efficiency and proliferation of the market for digital goods, both in terms

of the selection of material that is available and the means by which that material is distributed.

Traditional content-distribution techniques offer little protection from piracy. Digitally-encoded songs, movies, and other forms of electronic content are typically distributed to consumers on storage media such as compact disks (CDs) or diskettes. A consumer accesses the data contained on the storage media by e.g., reading the data into the memory of a personal computer (PC) or portable device (PD). Once the data are loaded onto the PC or PD, the consumer can typically save the data to another storage medium (e.g., to the hard disk of the PC) and/or apply compression algorithms to reduce the amount of space the data occupy and the amount of time needed to transfer a copy of the data to another user's computer. Thus, the fact that electronic content is originally stored on a fixed medium such as a CD or diskette typically does little to prevent the unauthorized distribution of the content, as the content can be removed from the storage medium, duplicated, and distributed with relative ease.

Another problem faced by content owners and producers is that of protecting the integrity of their electronic content from unauthorized modification or corruption, as another characteristic of traditional forms of digital content is the ease with which it can be manipulated. For example, once information is loaded onto a user's PC from the fixed storage medium on which it was originally packaged, it can be readily modified and then saved or distributed in modified form.

While increasing attention has been paid to the development of content-management mechanisms that address the problems described above, one obstacle to the adoption of such mechanisms is the reluctance of consumers to embrace new devices or content formats that render their existing devices and content collections obsolete. Thus, there is a need for protection mechanisms that enable new decoding devices to accept previously-encoded content (or content encoded in accordance with other protection schemes), and to also enforce the preferred content protection mechanism when handling content encoded therewith. There is also a need for content protection mechanisms that allow protected content to be played on pre-existing consumer devices, while ensuring that the protection mechanisms will be enforced when protected content is played on devices that recognize the protection mechanisms.

Accordingly, there is a need for systems and methods for protecting electronic content and/or detecting unauthorized use or modification thereof. There is also a

need for systems and methods that provide content producers and software and device manufacturers with the flexibility to support a specific protection scheme, but to also support pre-existing or legacy content, content encoded using other security schemes, and/or devices that are not designed to recognize the preferred protection scheme.

- 5 Moreover, there is a need to accomplish these goals without materially compromising the security that the preferred protection scheme is intended to provide.

### **SUMMARY OF THE INVENTION**

Systems and methods for using digital signature and watermarking techniques to control access to, and use of, electronic data are disclosed. It should be appreciated  
10 that the present invention can be implemented in numerous ways, including as a process, an apparatus, a system, a device, a method, or a computer readable medium such as a computer readable storage medium or a computer network wherein program instructions are sent over optical or electronic communication lines. Several inventive embodiments of the present invention are described below.

- 15 In one embodiment, a method for protecting a digital file against unauthorized modification is disclosed. The file is encoded by inserting a first watermark and multiple signature-containing watermarks into the file, where each signature-containing watermark contains the digital signature of at least a portion of the file. When access to a portion of a file is desired, the file is searched for the watermark that  
20 contains the signature for the desired portion of the file. If the signature-containing watermark is found, the digital signature is extracted and used to verify the authenticity of the desired portion of the file. Access to the desired portion of the file is denied if the signature verification process fails. If the signature-containing watermark is not found, the file is checked for the presence of the first watermark. If  
25 the first watermark is found, access to the desired portion of the file is inhibited or denied. However, if the first watermark is not found, access to the desired portion of the file is allowed. Thus, the signature-containing watermarks are operable to facilitate detection of modifications to the encoded file, and the first watermark is operable to facilitate the detection of the removal or corruption of the signature-  
30 containing watermarks.

In another embodiment, a method is disclosed for controlling access to an electronic file. A hidden code is inserted into the file—via a watermark, for example—and a plurality of modification-detection codes are also inserted, each

modification-detection code corresponding to a portion of the file. When access to a portion of the file is desired, the appropriate modification detection code is extracted from the file and used to determine whether the desired portion of the file has been modified. If it is determined that the desired portion of the file has been modified, access to the desired portion is prevented. If the modification detection code corresponding to the desired portion of the file cannot be found, then the file is checked for the presence of the hidden code. If the hidden code is found, access to the desired portion of the file is prohibited; otherwise access is allowed. Thus, the modification-detection codes can be used to detect modifications to the portions of the file to which they correspond, and the hidden code can be used to detect the removal of the modification-detection codes.

In yet another embodiment, a system for providing access to an electronic file is disclosed. The system contains a memory unit for storing portions of the electronic file, a processing unit, and a data retrieval unit for loading a portion of the electronic file into the memory unit. The system also includes a first watermark detection engine for detecting a signature-containing watermark in the electronic file and for retrieving a digital signature associated with the watermark. The system also includes a signature verification engine for verifying the integrity of a portion of the electronic file using a digital signature, and a second watermark detection engine for detecting a strong watermark. The system includes a file handling unit for granting a user access to a desired part of the file upon the successful verification of the part's integrity by the signature verification engine, or upon a failure to detect the signature-containing watermark and a failure to detect the strong watermark.

In another embodiment, a computer program product for controlling access to an electronic file is disclosed. The computer program product includes computer code for searching at least a portion of the electronic file for a first signature-containing watermark. The computer program product further includes computer code for retrieving a digital signature from the first signature-containing watermark, for using the digital signature to verify the authenticity of the portion of the electronic file to which the digital signature corresponds, and for inhibiting the use of the electronic file if verification fails. The computer program product also includes computer code for searching the electronic file for a second watermark if the first signature-containing watermark is not found, computer code for inhibiting use of the electronic file if the second watermark is found, and computer code for permitting use

of the electronic file if the second watermark is not found. The computer program product also includes a computer-readable medium for storing the computer codes.

In another embodiment, methods are disclosed for encoding data in a manner designed to facilitate the detection of unauthorized modifications to the data, and for  
5 controlling access to the data. First, a strong watermark is inserted into the data. The data are then divided into segments. A first watermarked segment is formed by inserting a first watermark into a segment of the data. The first watermarked segment is then compressed using a predefined compression algorithm, and a copy is decompressed. A signature is formed by encrypting a hash of at least a portion of the  
10 decompressed first watermarked segment. Next, a second watermarked segment is generated by inserting a second watermark into a second segment of the data, the second watermark containing the first signature. The second watermarked segment is compressed, decompressed, and signed in the same manner as the first segment was compressed, decompressed, and signed. The signature of the second watermarked  
15 segment is then inserted, via a watermark, into a third segment of the data. The process of (a) inserting a signature-containing watermark into a segment of data, (b) compressing and decompressing the watermarked segment, and (c) signing the decompressed watermarked segment is repeated for each of the segments, and the compressed watermarked segments are transmitted to a computer readable storage  
20 medium or a decoding device. When access to a portion of the encoded data is desired, the data are decompressed and the signature corresponding to the desired portion of the data is extracted from the appropriate signature-containing watermark. The signature is used to verify the authenticity of the decompressed data. If the signature verification process fails, access to the desired data is inhibited. Otherwise,  
25 access is allowed. If the watermark containing the signature for the desired portion of data cannot be found, then the data are checked for the presence of the strong watermark. If the strong watermark is found, access to the desired portion of the data is inhibited; otherwise, access is allowed.

In yet another embodiment, a method for managing at least one use of a file of  
30 electronic data is disclosed. Upon receipt of a request to use the file in a predefined manner, the file is searched for a signature-containing watermark. If the signature-containing watermark is found, a digital signature is extracted. The digital signature is used to perform an authenticity check on at least a portion of the file. If the authenticity check is successful, the request to use the file in the predefined manner is

granted. If the signature-containing watermark is not found, the file is searched for a strong watermark. If the strong watermark is found, the request to use the file in the predefined manner is denied. If the strong watermark is not found, the request to use the file in the predefined manner is granted.

5           In another embodiment, a method for managing the use of electronic data is disclosed. Upon receipt of a request to use the electronic data in a certain manner, a file is retrieved that contains one or more check values and a digital signature derived from the check values. The authenticity of the check values is verified using the signature, and the authenticity of at least a portion of the file is verified using the  
10   check values. If the file is found to be authentic, the request to use the file is granted.

          In another embodiment, a method is provided for managing the use of electronic data. An authentication file is created. The authentication file includes one or more hashes derived from the electronic data, a signature derived from the hashes, and information useful in locating the portion of the electronic data to which each  
15   hash corresponds. The authentication file is stored on a networked computer system. When a consumer attempts to use the electronic data in a certain manner—such as copying, moving, viewing, or printing the data—the authentication file is retrieved from the networked computer system and used to verify the authenticity of the electronic data. If the verification is successful, the consumer's request is granted. If  
20   the authentication file cannot be found, the electronic data are searched for the presence of a predefined watermark. If the predefined watermark is found, the consumer's request is denied. If the predefined watermark is not found, the consumer's request is granted.

          These and other features and advantages of the present invention will be  
25   presented in more detail in the following detailed description and the accompanying figures which illustrate by way of example the principles of the invention.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

          The present invention will be readily understood by the following detailed description in conjunction with the accompanying drawings, wherein like reference  
30   numerals designate like structural elements, and in which:

          Fig. 1 is an illustration of a system for practicing an embodiment of the present invention.

Figs. 2A and 2B illustrate techniques for generating a cryptographic signature and using the signature to verify the authenticity of the data to which the signature corresponds.

Fig. 3 is an illustration of a technique for verifying the integrity of a data  
5 signal using cryptographic signatures.

Fig. 4A illustrates a technique for encoding a data signal using cryptographic signatures and watermarks in accordance with an embodiment of the present invention.

Fig. 4B illustrates a system for encoding a data signal using cryptographic  
10 signatures and watermarks in accordance with an embodiment of the present invention.

Fig. 5A is an illustration of a system for decoding a data signal in accordance with an embodiment of the present invention.

Fig. 5B shows an illustrative embodiment of a signature verification engine in  
15 accordance with an embodiment of the present invention.

Figs. 6A, 6B, and 6C illustrate techniques for locating signature blocks in an encoded data signal in accordance with the principles of the present invention.

Fig. 7A illustrates a system for encoding compressed data in a manner designed to facilitate authentication of the data in accordance with an embodiment of  
20 the present invention.

Fig. 7B illustrates an encoding scheme designed to facilitate authentication of a data signal in accordance with an embodiment of the present invention.

Fig. 8 illustrates a shared signature scheme in accordance with an embodiment of the present invention.

Fig. 9A illustrates a technique for inserting a strong watermark in a data signal in accordance with an embodiment of the present invention.

Fig. 9B illustrates a technique for detecting the presence of a strong watermark in accordance with an embodiment of the present invention.

Fig. 10 is a flow chart illustrating a data encoding procedure in accordance  
30 with an embodiment of the present invention.

Fig. 11 is a flow chart illustrating a data decoding and authentication procedure in accordance with an embodiment of the present invention.

Figs. 12A, 12B, and 12C provide a comparison between several content management mechanisms.



Fig. 13 illustrates the operation of a content management mechanism in accordance with an embodiment of the present invention.

Fig. 14 illustrates an encoding scheme for use in connection with a content management mechanism of the present invention.

5 Fig. 15 illustrates a content management system in accordance with the principles of the present invention.

### **DETAILED DESCRIPTION**

A detailed description of the invention is provided below. While the invention is described in conjunction with several preferred embodiments, it should be  
10 understood that the invention is not limited to any one embodiment. On the contrary, the scope of the invention is limited only by the appended claims, and the invention encompasses numerous alternatives, modifications, and equivalents. For example, while several embodiments are described in the context of a system and method for using watermarks and digital signatures to protect audio signals encoded in Red Book  
15 audio and Sony® MiniDisc™ audio disc formats, those skilled in the art will recognize that the disclosed systems and methods are readily adaptable for broader application. For example, without limitation, the present invention can be applied in the context of video, textual, audio-visual, multimedia, or other data or programs encoded in a variety of formats. In addition, while numerous specific details are set  
20 forth in the following description in order to provide a thorough understanding of the present invention, it should be appreciated that the present invention may be practiced according to the claims without some or all of these details. Finally, certain technical material that is known in the art has not been described in detail in order to avoid obscuring the present invention.

25 In the following discussion, content will occasionally be referred to as “registered” or “unregistered.” “Registered” content generally denotes content encoded using a predefined encoding scheme—for example, content that includes special codes, signatures, watermarks, or the like that govern the content’s use. “Unregistered content,” on the other hand, refers to content that does not contain the  
30 predefined codes—whether as a result of operations performed on registered content (e.g., removal of specially-inserted watermarks or codes), or by virtue of the fact that the content was never registered in the first place (e.g., content that never contained the special codes, or that contains the codes of another registration format).

The systems and methods described herein enable the protection of content registered in accordance with a predefined encoding scheme, while also allowing secure access to unregistered content. In particular, systems and methods are provided for detecting and preventing access to unauthorized copies of protected content, and for detecting modification to, and/or corruption of, the protected content and the content-management codes it contains. Systems and methods are also provided for permitting the use of content that is not registered in accordance with a given content management or protection system, and for guarding against attempts to circumvent the protection system by modifying registered content to appear as though it had never been registered.

In a preferred embodiment a relatively hard-to-remove, easy-to-detect, strong watermark is inserted in the data signal. The data signal is divided into a sequence of blocks, and a digital signature for each block is embedded in the signal via a comparatively weak watermark. The data signal is then stored and distributed on, e.g., a compact disc, a DVD, or the like. When a user attempts to access or use a portion of the data signal (the data signal having been obtained from a CD, a DVD, the Internet, or other source), the signal is checked for the presence of the watermark containing the digital signature for the desired portion of the signal. If the watermark is found, the digital signature is used to verify the authenticity of the desired portion of the signal. If the watermark is not found or the signature does not confirm the authenticity of the signal, then the signal is checked for the presence of the strong watermark. If the strong watermark is found, further use of the signal is inhibited, as the presence of the strong watermark in combination with the absence or corruption of the signature or signed block provides evidence that the signal has been improperly modified. If, on the other hand, the strong mark is not found, further use of the data signal can be allowed, as the absence of the strong mark indicates that the data signal was never marked or registered with the digital signature. Thus, the present invention is operable to inhibit the use of previously-registered content that has been improperly modified, but to allow the use of content that was not previously registered, such as legacy content or content registered using an alternative encoding scheme.

Fig. 1 illustrates a system 100 for practicing an embodiment of the present invention. As shown in Fig. 1, system 100 preferably includes an encoding system 102, such as a general-purpose computer; a decoding system 104, such as a portable

audio or video player, a general-purpose computer, a television set-top box, or other suitable device; and a system for communicating therebetween.

As shown in Fig. 1, in one embodiment encoding system 102 includes:

- a processing unit 118;
- 5     • system memory 120, preferably including both high speed random access memory (RAM) and non-volatile memory such as read only memory (ROM) and/or a hard disk for storing system control programs, data, and application programs for encoding data using, e.g., watermarking and/or digital signature techniques;
- 10    • one or more input/output devices, including, for example:
  - a network interface 128 for communicating with other systems via a network 130 such as the Internet;
  - I/O ports 132 for connecting to, e.g., portable devices, other computers, microphones, or other peripheral devices;
- 15    • one or more disk drives 134 for reading from, and/or writing to, e.g., diskettes, compact discs, DVDs, Sony® MiniDisc™ audio discs produced by Sony Corporation of Tokyo, Japan and New York, New York, and/or other computer readable media;
- 20    • a signal processor 116 for receiving a signal from an input device such as microphone 136, and converting the signal to, e.g., a pulse-code modulated (PCM) signal;
- a user interface 122, including a display 124 and one more input devices 126, such as a keyboard and/or a mouse; and
- 25    • one or more internal buses 133 for interconnecting the aforementioned elements of the system.

The operation of system 102 is controlled primarily by programs stored in system memory 120 and executed by the system's processing unit 118. These

programs preferably include modules for accepting input data signals from, e.g., microphone 136, disc 135, I/O ports 132, and/or other data storage or recording devices. System memory also preferably contains modules for processing the input data signals in accordance with the techniques described herein. For example, system

5 102 preferably includes modules 110 for dividing or parsing an input data signal into blocks, modules 112 for applying watermark(s) to a data signal, modules 114 for signing data blocks using cryptographic signature algorithms, optional modules 116 for compressing a data signal, and modules 118 for transmitting a data signal to a computer readable medium such as disk 135, or to another system via network 130.

10 Although a software implementation of these modules is shown in Fig. 1, one of ordinary skill in the art will appreciate that some or all of these modules may be implemented in computer hardware or circuitry without departing from the principles of the present invention. Encoding system 102 may also include a secure, tamper-resistant protected processing environment (not shown) and/or modules for

15 associating the data signal with rules and controls which govern its use, as described in commonly-assigned U.S. Patent No. 5,892,900, entitled "Systems and Methods for Secure Transaction Management and Electronic Rights Protection," issued April 6, 1999 ("the '900 patent"), which is hereby incorporated by reference.

Any suitable system or device can be used for transporting data from encoding

20 system 102 to decoding system 104, including a digital or analog network 130 such as the Internet, the manual transportation of a magnetic or optical disc 135 from one system to another, or any combination of these or other suitable communication or transmission techniques.

Decoding system 104 is operable to decode signals encoded by system 102, to

25 apply security transformations to those signals, and to output the decoded signals to a user in accordance with the results of the security transformations. As described in more detail below, decoding device 104 is preferably operable to accept data that are properly registered and data that were never registered, while rejecting registered data that have been improperly modified and unregistered data that have been modified to

30 appear as though it were registered. In one illustrative embodiment decoding system 104 includes:

- a processing unit 152;

- system memory 153, preferably including a combination of both RAM and ROM for storing system control programs, data, and application programs for, e.g., applying security transformations to a data signal. System memory 153 may also include removable non-volatile memory such as a flash memory card;
- a disk drive 155 for reading from, and/or writing to, magnetic and/or optical storage media such as diskettes, CDs, DVDs, MiniDisc™ audio discs, and/or other storage media;
- a network interface 165 for communicating with other systems via a network 130 such as the Internet;
- a signal processor 156 for, e.g., converting digital signals into analog form;
- one or more input/output ports 157 such as Universal Serial Bus (USB) port 157a, speaker jack 157b, and infrared port 157c for receiving signals from, and transmitting signals to, external devices such as encoding system 102, speaker 158, display 162, disk drive 155, and the like;
- a user interface 160, including a display 162 and one more input devices such as control panel 164; and
- one or more internal buses 166 for interconnecting the aforementioned elements of the system.

The operation of decoding system 104 is controlled primarily by programs stored in system memory 153 and executed by the system's processing unit 152. These programs preferably include modules for obtaining a data signal and for processing it in accordance with the techniques described herein. For example, system 104 preferably includes modules 170 for receiving and parsing an encoded data signal, modules 172 for detecting and extracting watermarks contained in the data signal, modules 174 for verifying the authenticity of cryptographic signatures contained in or associated with the signal, and optional modules 176 for decompressing compressed data signals. Decoding system 104 also preferably includes modules 178 for controlling use of decoded data signals (e.g., controlling

transmission of data to system memory 153, disk 135, display 162, or to other systems via network 130) in accordance with the output of watermark detection/extraction modules 172, signature verification modules 174, and/or in accordance with other rules or controls associated with the data signal or the system. In a preferred embodiment modules 172, 174, 176, and 178 are implemented in firmware stored in the ROM of decoding device 104 along with certain data and cryptographic keys used by the modules. However, one of ordinary skill in the art will appreciate that some or all of these modules may be readily implemented in computer hardware or circuitry without departing from the principles of the present invention. Decoding system 104 may also include a protected processing environment (not shown) for storing sensitive data and keys. For example, a protected processing environment such as that described in the '900 patent (previously incorporated by reference herein) could be used.

As described above, it is desirable to prevent attackers from copying a digital file from a storage medium such as a compact disc and distributing unauthorized copies to others. One obstacle to this type of attack is the fact that the audio and video files contained on CDs and DVDs are typically quite large, and can thus be impractical to transmit in their original form. As a result, attackers often employ compression techniques to reduce content files to a fraction of their original size, thus enabling copies to be transmitted over networks such as the Internet with relative ease, and to be efficiently stored on the limited and/or relatively expensive memory of personal computers and portable devices. Many popular compression technologies, such as MP3, are able to achieve high compression ratios by removing information from the original content file. As a result, when a compressed file is decompressed it will often be slightly different from the original version of the file, although compression technologies are typically designed to minimize the impact these differences have on a user's perception of signal quality. However, detection of these differences can enable the detection of piracy, as distributors of illegal copies typically compress content before distributing it.

In addition to preventing attackers from distributing unauthorized copies of a digital work, it is also desirable to preserve the security of digital files by detecting unauthorized modifications. For example, if a content file contains special codes indicating that the content can only be used on a specific device, or that the content cannot be compressed, copied, or transmitted, an attacker may attempt to remove

those codes in order to make unauthorized use of the content. Similarly, an attacker may attempt to add special codes to an unprotected piece of content in order to use the content on a device that checks for the presence of these codes as a precondition for granting access to the content or for performing certain actions (e.g., accessing the content more than a certain number of times, printing a copy of the content, saving the content to a memory device, etc.).

For example, a CD may contain a variety of separate tracks and/or features. Some tracks or features may be encoded with a protection scheme (as described in more detail below) that prevents unauthorized copies and/or modified versions of the content from being played on supported devices, but does not otherwise modify the content, thus allowing it to be played on pre-existing or other devices that do not support the protection mechanism. Other tracks on the CD can be encoded in such a manner that they can only be played on devices or systems that include appropriate decoding software or hardware, thus encouraging users to purchase devices and/or software that supports the preferred content protection mechanism.

#### **Watermark/Signature Modification Detection Mechanism**

In a preferred embodiment the detection of unauthorized, lossy compression and/or other modifications to a data signal is facilitated by inserting a mark into the signal that is relatively difficult to introduce, yet relatively easy to extract by a decoding device 104. Such a mark may be inserted by an encoding system 102 operated by, e.g., the content creator, the content distributor, and/or a third party placed in charge of securing content on behalf of its owners. The integrity of the inserted mark is preferably easily corrupted if any transformation is applied to the data signal. That is, the mark is preferably chosen such that modifications to the content file will corrupt the mark and/or change a predefined relationship between the mark and the file, thereby enabling the mark to serve as a means of verifying the authenticity of the file's content. Thus, use of such a mark facilitates the detection of unauthorized copies of a file, since unauthorized copies are often made using lossy compression schemes such as MP3 which modify the file.

In a preferred embodiment the above-described mark comprises a digital signature. An exemplary technique for applying a digital signature to a block of data is shown in Figs. 2A and 2B. Referring to Fig. 2A, encoding system 102 creates a signature 205 by (i) applying a strong cryptographic hash algorithm 202 (e.g., SHA-1) to a block of data 200, and (ii) encrypting the resulting message digest 204 with the

encoding system's private key 208. In other embodiments the message digest is encrypted (and decrypted) using a secret key that is shared between the encoding and decoding systems.

Referring to Fig. 2B, upon receiving a block of data 200' and a corresponding signature 205', decoding system 204 applies hash function 214 to the received data to yield message digest 216. Decoding system 204 also decrypts signature 205' using the sender's public key 218 (or a shared secret key, as appropriate) to yield message digest 220. Message digest 216 is then compared with message digest 220. If the two message digests are equal, the recipient can be confident (within the security bounds of the signature scheme) that data 200' are authentic, as any change an attacker made to data 200 or to signature 205 would cause the comparison to fail. While a digital signature technique such as that shown in Figs. 2A and 2B is used in one preferred embodiment, in other embodiments other signature and/or marking techniques may be used.

Since knowledge of the signing key is generally sufficient to enable the production of registered material, it is desirable to protect the signing key against attack. Physical attacks can generally be avoided by placing the key in a single protected environment; for example, at a content certification authority. To protect against cryptographic attacks, any of the well-known and reliable public key technologies may be used. For example, in one embodiment an RSA algorithm is used with a relatively large key (e.g., between 2048 and 4096 bits), although it will be understood that other algorithms and/or key sizes could be used instead.

Problems may arise if conventional signature techniques are applied to data stored on magnetic or optical storage media, to streaming data, or to data received from electronic communications networks such as the Internet. For example, data retrieved from CDs, DVDs, MiniDisc audio discs, hard disks, and the like will often contain relatively short, random, burst errors which can cause a signature to fail even in the absence of malicious tampering, as signatures are generally quite sensitive to errors or variations in the data upon which they are based. In addition, computing a single signature for a large file such as an audio track or a movie can require a relatively large amount of computing resources, which may not be available on a consumer's decoding/playing device. Moreover, with regard to streaming data, it will typically be undesirable and/or impractical for the decoding device to wait for an entire file to be received before verifying the file's authenticity and releasing it for



use, as consumers will often be unwilling to wait for the entire file to be received, and decoding devices will often lack enough memory to store the entire file. The present invention provides systems and methods that can be used to overcome some or all of these limitations without materially compromising the security offered by the  
5 signature scheme.

Fig. 3 illustrates a technique for applying digital signatures to a data signal 300. Data signal 300 may, for example, represent PCM data from an audio track on a compact disc or a MiniDisc audio disc, video data from a DVD, a stream of textual information received from the Internet, part of a computer program or applet, or any  
10 other suitable data signal. As shown in Fig. 3, one approach to signing data signal 300 is to logically and/or physically partition data signal 300 into a sequence of data blocks or segments 304, each segment 304 having its own signature 306. When decoding system 104 receives the encoded data signal 302, system 104 verifies the authenticity of blocks 304 using, e.g., the techniques previously described in  
15 connection with Fig. 2B. In a preferred embodiment the size of blocks 304 is made small enough to minimize the likelihood that random burst errors in the data signal will occur in more than a predefined fraction of the blocks, yet large enough to ensure that the signature 306 associated with each block 304 is relatively difficult to crack and/or remove from the signal without degradation. One of ordinary skill in the art  
20 will appreciate that optimal choices for the block size and the signature size will typically depend on the application, and can be readily determined empirically.

A problem with the approach shown in Fig. 3, however, is that when signatures 306 are inserted into data signal 300, they can produce undesirable degradation of the signal. For example, if the data signal represents an audio file, the  
25 signature blocks can produce an audible hissing noise when the file is played. Since signal quality is usually the primary concern of a user, this type of degradation should be avoided. While reducing the size of signatures 306 will typically lessen the signal degradation, it also reduces the security offered by the signature scheme. Moreover, while it is possible (as in one embodiment) to design a decoding device 104 that it is  
30 operable to remove the signatures from the data signal before the data signal is output, consumers may be reluctant to purchase content that can only be played on such a device.

As shown in Fig. 4A, these problems are alleviated in one embodiment of the present invention through the use of a watermarking technique. Referring to Fig. 4A,

the signature 406 for each block 404 of data signal 400 is embedded in encoded data signal 402 using a watermark 405. By embedding signatures 406 in this manner, unacceptable degradation of signal 400 can be substantially avoided.

In general terms, watermarking involves the insertion of additional data into a  
5 signal in such a manner that the signal appears unchanged (at least upon casual inspection). It should be appreciated that any suitable watermarking and/or steganographic technique may be used in accordance with the principles of the present invention. Techniques for watermarking various types of signals (e.g., audio, visual, textual, etc.) are well-known in the art, and watermarking technology is readily-  
10 available from a variety of companies such as Fraunhofer IIS-A of Am Weichselgarten, 3 D-91058 Erlangen, Germany, and Verance Corporation of 6256 Greenwich Drive, Suite 500, San Diego, California (formerly ARIS Technologies, Inc.). Additional exemplary watermarking and steganographic techniques are described in commonly-assigned U.S. Patent No. 5,943,422, entitled "Steganographic  
15 Techniques for Securely Delivering Electronic Digital Rights Management Control Information Over Insecure Communication Channels," and Proceedings of the IEEE, "Identification & Protection of Multimedia Information," pp. 1062-1207 (Jul. 1999), each of which is hereby incorporated by reference.

An obstacle to embedding digital signatures in a data signal via a watermark is  
20 that the very process of embedding the signatures is likely to change the signal somewhat, thus rendering the signatures ineffective in verifying the signal's authenticity. System designers are thus faced with an apparent catch-22: a signature will correspond to the signal as it existed before the signature was embedded, but the system designer will want to verify the authenticity of the signal as it exists after the  
25 signature has been embedded.

The present invention provides systems and methods for overcoming the problem described above. Specifically, as shown in Fig. 4A, in a preferred embodiment the signature for a given portion of data 404 is included in the watermark for the following block 403 (e.g., the signature 406a for signature block 404a is  
30 embedded in block 403b via watermark 405b). As a result, the signature for a given block 404(n) can be used to verify the authenticity of the preceding block 404(n-1), including the watermark/signature embedded within that block. Although for purposes of illustration Fig. 4A depicts a signature 406 being computed for a portion 404 of a larger block 403, it will be appreciated that signature 406 could instead be

computed for the entire block 403 or any suitable portion thereof without departing from the principles of the present invention.

Fig. 4B illustrates the operation of encoding system 102 in an embodiment that performs the techniques described in connection with Fig. 4A. Referring to Fig. 4B, encoding system 102 is operable to watermark a first portion of a PCM signal 400 with a digital signature 418 corresponding to a second portion of the PCM signal 400. Incoming PCM data are stored in an input buffer 410. When a predetermined amount of data (e.g., a block) has accumulated in input buffer 410, the data are sent to mark-injection engine 412, which inserts a watermark in the data to yield watermarked PCM data 414. Watermarked PCM data 414 may then be sent to, e.g., a user, a disk, or some other suitable destination, while a copy of data 414 is sent to signature engine 416. Signature engine 416 is operable to create a signature 418 corresponding to watermarked PCM data 414. Signature 418 is then sent to a latch or delay element 420. Delay element 420 stores signature 418 until the next block of incoming PCM data is ready to be sent to watermarking engine 412, at which point signature 418 is retrieved from delay element 420 for use by watermarking engine 412. Thus, the signature 418 of all or part of the watermarked version of a given block of PCM data is included in the watermark of the following block in the signal.

The process shown in Figs. 4A and 4B can be repeated for each block of data in the data signal 400, the result being a data signal 402 containing a succession of blocks, each block being watermarked with the signature of a portion of the block just ahead of it in the transmission stream. Thus, the present invention is advantageously able to provide the security of digital signatures without unduly degrading the quality of the data signal. Note that the first block of data that is transmitted will typically not contain a signature. However, in one embodiment the first block may contain the signature or hash of certain metadata about the file. For example, if the file is an audio track, the first block may contain a watermark that includes a signature or hash relating to the name of the track, the name of the track's producer, and/or other desired information. Note, too, that there will typically not be a signature that corresponds to the last block of data in the stream, since there is not a block of data that follows the last block into which the signature can be embedded. Alternatively, a final block that includes the signature for the last data block can also be transmitted.

While the embodiments illustrated in Figs. 4A and 4B insert the signature for a given block into the following block in the data signal, one of ordinary skill in the art

will appreciate that the signature could be readily inserted at other locations in the data signal, instead. For example, if the data signal is preprocessed and/or appropriately buffered (as opposed to being encoded and stored or transmitted on-the-fly), the signature for a given block of data may be inserted in a preceding block in the encoded data signal. It should also be appreciated that the signature for a given block  
5 need not be placed in an adjacent block.

The performance of the above-described scheme can typically be enhanced by choosing the size of the block 404 that is to be signed so that it is much smaller than the size of the watermark block 403. However, signature blocks 404, and the  
10 frequency with which they appear in the signal 402, are preferably large enough that if an attacker were to replace or remove a signed block, the quality of the data signal would be perceptibly degraded (e.g., in the case of an audio file, an audible hissing might be heard when the modified file was played). In one illustrative encoding of an audio signal, a signature block of 64 kilobytes (i.e., 0.36 seconds of PCM data) and a  
15 watermark block of between 176 kilobytes and 882 kilobytes (i.e. 1 to 5 seconds) are used, where the PCM signal consists of two channels of 16-bit samples taken 44,100 times per second.

Fig. 5A illustrates the operation of an embodiment of decoding system 104 upon receipt of a signal encoded in the manner described in connection with Figs. 4A and 4B. Referring to Fig. 5A, decoding device 104 is configured to decode an input  
20 data signal—such as that obtained from a CD 135 inserted into disk drive 155, or that obtained from network 130 via network interface 165—and to either inhibit or allow the use of the data signal depending on the results of the decoding process. Incoming blocks of data 502 are stored in buffer/delay element 508, and an embedded signature  
25 506 is extracted from a watermark in each block 502 by mark-extraction engine 504. The signature 506 that is extracted from a given block (e.g., a block 502 received at time  $t$ ), is provided to signature verification engine 512, which is operable to verify the authenticity of the previously-received block to which the signature 506 corresponds (e.g., a block 510 received at time  $t-1$ ). The output 515 of signature  
30 verification engine 512—indicating whether block 510 was modified or signature 506 was corrupted—is used to control the release of block 510 and/or the initiation of an appropriate defensive response if modification is detected. Released content may, for example, be sent directly to an output device, such as speaker 158, display 162, disk

135, or the like; and/or may be sent to memory 153 for storage pending authentication of additional portions of the signal.

Fig. 5B provides a more detailed illustration of the operation of an embodiment of signature verification engine 512. As shown in Fig. 5B, signature verification engine 512 is operable to accept a signature 506 and a block of data 510, and to use signature 506 to evaluate the authenticity of block 510. Specifically, signature 506 is decrypted using, e.g., a public key 520 (or secret key as appropriate) to yield a message digest 522. Similarly, a message digest 526 is derived from input data 510 by hashing engine 524. The two message digests are compared, and, if they are equal, block 510 is deemed authentic; if the two message digests are not equal, appropriate defensive action can be taken. Thus, in order for an attacker to make compressed or otherwise modified content pass this verification test, the attacker will generally need to reproduce the originally-encoded data signal, which will typically be impractical.

For purposes of practicing the present invention, any suitable response may be taken upon detection of unauthentic data by signature verification engine 512. For example, in one embodiment further receipt and/or use of the data signal is terminated, degraded, and/or hampered in some other manner. In some embodiments notification that an error (or a certain level of errors) has been detected may also be sent via network interface 165 to another system, such as encoding system 102. Tamper response logic 516 may also store data in system memory 153 indicating that an error has been detected.

In some embodiments signals containing a certain amount, percentage, or pattern of unauthentic data blocks are allowed to be used without triggering additional defensive mechanisms. This can be especially useful when dealing with signals that suffer from burst errors, as these errors typically do not evidence an intent to tamper with the signal. With real devices, it has been found that only a relatively small percentage of the signed blocks are affected by such errors. Thus, to avoid mistaken rejection of content, a threshold can be used for signature or hash acceptance, the threshold being based on the number or percentage of good (or bad) blocks detected. In one embodiment only those signals that contain at least a predefined number or percentage of good blocks per unit are accepted. For example, a group of blocks may be accepted only if at least 80% of the blocks obtained during an, e.g., 15 second

period are valid, regardless of whether errors cause signature or hash verification to fail for the remaining 20% of the blocks.

In order to process watermarked/signed data in the manner described above, decoding engine 104 is operable to detect block boundaries so that it can locate the watermarks and signatures. For purposes of practicing the present invention the detection of block boundaries can be accomplished using any suitable technique, such as the auto-synchronization techniques used by conventional watermarking algorithms. However, because PCM data signals typically do not include synchronization information (apart from the fact that each PCM sample starts on a double byte boundary) in one embodiment the task of detecting signature blocks is simplified by including a "guess" (or "hint") in each watermark, the guess enabling the signature-verifying engine to find the signed blocks more easily. In a preferred embodiment the guess comprises an easy-to-compute representative value—such as the logical exclusive-or (XOR)—of the signed block or a portion thereof. This optimization allows the verification system to avoid hashing all possible signature blocks in the watermark block to look for a possible match. In addition, as shown in Fig. 4A, in a preferred embodiment only one block of data 404 is signed per watermark block 403, and the signed block 404 is localized within the watermark block 403.

In one embodiment the guess comprises a 16-bit exclusive-or (XOR) of the PCM samples contained in the signature block. That is, the guess comprises the running bitwise-XOR of all of the samples in the signature block. For purposes of illustration, Fig. 6A shows an 8-bit "running bitwise XOR" computed in this manner. It should be appreciated, however, that any suitable technique can be used to compute the guess, and the guess can comprise any suitable number of bits. For example, the "window" of PCM samples used to compute the guess need not be the same size as the signature block, although smaller windows may result in a greater number of false positives (i.e., matches with other groups of samples besides the signature block). Moreover, while in one embodiment a running XOR is used, as it is easy to compute on the fly, one of ordinary skill in the art will recognize that other transformations could be used instead. For example, transforms that are characterized by the following relationship typically make good candidates for computing the guess:

$$A [TRANSFORM] B = X; \text{ and}$$

$$A [TRANSFORM'] X = B$$

Thus, it will be appreciated that any suitable technique for generating the guess can be used without departing from the principles of the present invention, the primary purpose of the guess simply being to facilitate location of the signature block.

Once the guess has been calculated, it is inserted into the data signal by the watermarking engine of encoding system 102. Since the guess typically contains less information about the block than the signature itself, it generally does not provide additional security, and thus need not be signed. Decoding system 104 is operable to retrieve the watermarks from the data signal – each watermark containing a signature and a guess that can be used to locate the data block to which the signature corresponds.

Figs. 6B and 6C illustrates how the guess can be used to locate a signature block. As shown in Fig. 6B, in one embodiment the signature block is located by sweeping a window 610 across the previously-received watermark block (or some other suitably large portion of received data, so as to ensure that the swept portion is likely to include the signature block) and calculating the XOR of the samples in the window in the same manner used to calculate the guess. When a location is found at which the window's XOR value equals the guess, the decoding system's signature verification engine proceeds with verifying the signature against the windowed block in the manner described above in connection with Fig. 5B.

The dynamic computation requirements of computing the XOR of each window are relatively low, as the XOR from the previous window can simply be XOR'd with the value of the sample 612 that was removed from the window when the window was moved to its new position, and the result can then be XOR'd with the value of the sample 614 that was added to the window.

Fig. 6C is a flow chart that further illustrates the signature-block-location process described above. Referring to Fig. 6C, the XOR value of the first potential signature block (i.e., block 608 in Fig. 6B) is computed by XORing successive PCM samples for an initial segment of data (620 - 624). Once enough samples have been XOR'd (i.e., a "yes" exit from block 624), the running XOR for the first potential signature block is compared with the guess (626). If the two values are equal (i.e., a "yes" exit from block 626), the hash of the potential signature block is calculated (634) and compared with the decrypted signature (636). If the hash matches the decrypted signature (i.e., a "yes" exit from block 636), then a valid signature has been found (640); otherwise, the search for a valid signature resumes (630) and/or

appropriate defensive action is taken. If, on the other hand, the XOR for a given window is not equal to the guess (i.e., a "no" exit from block 626), then the window is moved forward one sample and the value of the running XOR for the new window is computed (628, 630, 620, 622). This process is repeated until the signature block is found. If the signature block is not located within a predefined portion of data (e.g., the watermark block), then decoding system 104 notes that a valid signature was not found (632) and takes appropriate responsive action (e.g., terminates further access to the file, displays an error message, checks for other watermarks as described below, or simply records the result).

10 A modification to the embodiments described above will generally be needed to support authorized, lossy-compression of a signal (e.g., as with signals encoded and distributed in MiniDisc format). Fig. 7A illustrates an exemplary solution, which can be implemented by modifying the system shown in Fig. 4B. Referring to Fig. 7A, PCM data 700 are input to encoding system 102. Encoding system 102 includes a watermarking engine 702 for inserting a watermark to form watermarked PCM data 704. Watermarked PCM data 704 are sent to compression engine 706, which compresses the data using the authorized compression technique. For example, use might be made of a compression scheme such as MPEG-2 AAC; the ATRAC and ATRAC3 compression technologies developed by Sony Corporation; the AC-3  
15 algorithm developed by Dolby Laboratories, Inc., of 100 Potrero Avenue, San Francisco, California 94103-4813; the Windows® Media Audio format developed by Microsoft Corporation, of One Microsoft Way, Redmond, Washington 98052-6399, or any other suitable compression technique. Compressed data 708 are then output by encoding system 102 (e.g., transmitted to storage or to a decoding system 104), while  
20 a copy of compressed data 708 is sent to decompression engine 710.

Decompression engine 710 reverses the compression process, yielding decompressed PCM data 712. That is, decompression engine 710 emulates the decompression employed by decoding system 104. If the compression performed by compression engine 706 (and the decompression performed by engine 710) is lossless,  
30 then decompressed data 712 will be the same as watermarked PCM data 704. However, if compression is lossy, this will typically not be the case. Decompressed data 712 are sent to signature engine 714, which generates a digital signature 716 corresponding to the data. Signature 716 is then sent to a delay block (e.g., a latch or buffer), where it waits until the next block of PCM data is ready to be watermarked, at



which point signature 716 is inserted into the PCM data block by watermark engine 702. As one of ordinary skill in the art will appreciate, one or more buffers (not shown) can also be inserted between the various other blocks of Fig. 7A in order to ensure proper timing of the data flow through the system.

5           Thus, the system shown in Fig. 7A, like the system shown in Fig. 4B, is able to use digital signatures to achieve a high level of security without unacceptably degrading signal quality. Moreover, as shown in Fig. 7A, these goals can be achieved even when lossy compression is applied to the input signal. Specifically, by decompressing compressed data 708 before generating signature 716, encoding  
10       system 102 ensures that signature 716 will correspond to the decompressed data block 712 that a decoding system obtains after decompressing block 708. Thus, the system shown in Fig. 7A enables detection of unauthorized compression, which will often employ a different compression algorithm (e.g., MP3) than the authorized compression algorithm used by decoding system 102 (e.g., a proprietary compression  
15       algorithm).

          A signal that is encoded in the manner shown in Fig. 7A can be decoded simply by decompressing the encoded, compressed signal and applying the decoding techniques described above in connection with Fig. 5A. Because watermarking algorithms typically incorporate some redundancy and error correction capability, the  
20       original watermark can be recovered even after undergoing compression.

          Another obstacle to the use of authorized compression techniques by encoding system 102 is that decompression engines are typically not completely deterministic (i.e., decompressing a compressed signal will generally not yield the same result each time). In this regard, it has been observed that some decompression engines  
25       effectively assign random values to the least significant bits of the decompressed signal. Thus, even if the techniques described in connection with Fig. 7A are used, the signature for a given block may fail to verify. In order to account for this, in one embodiment the watermark also includes a two-bit field containing information about the reliability of the signal's least significant bits. The two-bit field indicates how  
30       many PCM sample bits should be included in the signal for purposes of computing the signature. Bits not included in the signal are assumed to be zero. As shown in Fig. 7A, this quality indicator 713 is input to signature engine 714, and the signature is computed accordingly. Note that quality indicator 713 need not be signed along with the signal, as it is generally not possible to mount an attack by changing these bits,

since signature verification will fail if these bits do not reflect the values actually used in computing the signature. The signature engine of decoding device 104 is operable to retrieve the quality indicator from the watermark, and to use it in computing the signature of the received data signal.

5 As shown in Fig. 7B, an illustrative encoding of this two-bit signal is:

- 00: All 16 bits of each PCM word 720 are relevant (e.g., Red Book CDs);
- 01: Only the 12 most significant bits of each PCM word 720 are relevant;
- 10: Only the 10 most significant bits are relevant;
- 11: Only the 8 most significant bits are relevant.

10 One of ordinary skill in the art will appreciate that the number of bits appropriate for a particular compression algorithm can be readily determined empirically. It should also be appreciated that in some embodiments the quality indicator may consist of a different number of bits (e.g., 3 bits, 1 bit, etc.) in order to provide higher (or lower) resolution.

15 A technological constraint on the techniques described above is that conventional watermarking algorithms generally cannot transport large amounts of data. In this regard, it should be noted that if each of the items set forth above is included in the watermark for each block, each watermark will contain almost 261 bytes of data (e.g., a two-bit quality indicator, a four-byte guess, and a 2048-bit  
20 signature). This a relatively large amount of data for a watermarking algorithm to handle with current technology. Although simply reducing the size of the payload will alleviate this problem, it will also tend to reduce the security and/or efficiency of the system. Another way to alleviate this problem is to make the watermarking block bigger, thus allowing the payload to be distributed over a larger portion of the data  
25 signal. However, this approach also tends to reduce the security of the system, as it reduces the frequency at which signed blocks appear in the signal.

Thus, in one embodiment a novel error-recoverable shared signature scheme is used. As described below, this signature scheme is resistant to errors in the signed data, and yet is generally as robust as a conventional signature scheme. An  
30 implementation of this technique is illustrated in Fig. 8. As shown in Fig. 8, portions 802 of a data signal 800 are partitioned into multiple sub-blocks 804. Each sub-block

804 is hashed, and the hashes 806 are concatenated. The concatenation of hashes 808 is encrypted, and the resulting signature 810 is embedded in the next watermark block of the signal, as previously described. In one embodiment the signed blocks 804 are 64 kilobytes. Thus, although the signature 810 remains 256 bytes (and the watermark payload remains approximately 261 bytes), the signature and other payload items are now spread over a much larger amount of data (e.g., 15 - 30 seconds of data, instead of 1 - 5 seconds) than they would if each signature block 804 in data signal 800 had its own watermark.

Decoding system 104 retrieves the signature from the watermark in the manner previously described. The signature is decrypted to yield hash concatenation 808, and the hash values 806 in hash concatenation 808 are used to verify the authenticity of the corresponding blocks 804 in the data signal.

Since secure hashes generally behave as random data, this solution is believed to be as secure as techniques which pad a single hash. If an error appears in one of the data partitions 804, signature 810 will still verify for all partitions 804 except for the one that is affected. Moreover, such errors can be readily detected and handled. The appropriate number of correct blocks to obtain in order to decide that the signature is correct can be determined in a straightforward manner using statistical analysis of the quality of the PCM signal for the given application.

In one embodiment the signed blocks 804 within a given watermark block 802 are spread substantially equally, and thus it is typically only necessary to find one such block in order to localize the rest. However, care should be taken in using the guess field, as failure to find the first signature block 804 can lead to failure to find the rest of the blocks in the hash concatenation, thus causing signature verification to fail. Accordingly, in one embodiment a guess for more than one block is included in the watermark. The optimal number of guesses for a given application can be readily determined empirically by examining, e.g., signal quality. The optimal number of blocks to be included in each signature will typically depend on the final key size and the hashing algorithm that is used (since the maximum size of the hash concatenation will typically correspond to the size of the key, and the size of each hash will determine how many hashes can fit in such a concatenation). As an example, in one embodiment the SHA1 or RIPEMD160 hashing algorithms are used with 2048 bit encryption keys, and 12 hash blocks are included in each signature (i.e., 2048 bits per key/128 bits per hash = 12 hashes).

### **Multi-level Protection**

In systems that allow the use of pre-existing content (e.g., legacy content and/or content encoded using other protection schemes), it is desirable to detect an attacker's attempt to make registered content appear as if it were pre-existing content in order to hide the fact that the registered content is being used without authorization or has been modified in some other manner. For example, an attacker may attempt to remove the watermarks and/or signatures associated with a protected file. In one embodiment this attack is countered through the use of a hard-to-remove, easy-to-retrieve, low-bit-rate watermark. For example, a single bit of information can be encoded in the signal in such a way that it cannot be easily removed. This watermark is preferably applied to registered content before introduction of the relatively weak signature-containing watermarks described above. Thus, if an attacker is able to successfully remove the weak watermark and signature, the strong watermark will remain, and will serve as an indication that the data have been tampered with. Since the strong watermark need not contain any information (just its presence is important), it will typically be difficult for an attacker to detect or remove.

Strong watermarking techniques are well-known in the art, and for purposes of practicing the present invention any suitable technique can be used to implement the strong watermark, including, for example, the commercially-available watermarking technology developed by Fraunhofer IIS-A, Verance Corporation, or others. In the context of audio data, for example, one way to introduce such a mark is via sound subtraction. This process makes use of the fact that subtracting pieces of sound from an audio signal is generally less perceptible to a listener than adding sounds to the signal. In one embodiment the mark insertion procedure consists of deleting some parts of the signal in the frequency domain. The parts to be deleted (i.e., the deletion pattern) are preferably selected so that the user's subjective listening experience is not materially affected. For example, this can be done using well-known psycho-acoustical or perceptual modeling techniques. In a preferred embodiment the deletion pattern is chosen in a manner similar to that used by the first step of many well-known lossy-compression algorithms, such as MP3 and/or AAC. Collusion with existing lossy-compression algorithms can be avoided by using a slightly different pattern than, or a superset of the patterns used by, these algorithms.

Detecting the strong mark involves detecting the gaps in the signal, and can be performed using well-known filtering techniques. Due to listeners' sensitivity to

sound addition, it will typically be infeasible for an attacker to refill the deleted gaps of the signal above a given threshold without introducing perceptible disturbances in the signal. In a preferred embodiment the gap detection threshold is set above this audibility threshold, such that filling in the gaps to prevent detection of the strong mark will result in undesirable degradation of the audible signal.

Another technique for implementing the strong watermark makes use of a keyed, watermarking algorithm. Keyed watermarking algorithms typically include two steps:

1. *Detection of places in the signal where a mark can be inserted.* Mark-holder candidates are typically identified by analyzing one or more signal characteristics, such as the audible signal degradation that a given modification will introduce, or the probability that the mark contained in a given mark holder will be destroyed by an attack. The set of potential mark-holders is typically quite large.
2. *Insertion of the mark in a subset of the mark-holder candidates.* The mark is inserted into a subset of the mark-holder candidates using a key, knowledge of the key generally being necessary to find the selected mark holders and retrieve their payload. Typically each of the mark-holders contains a subpart of the payload. This subpart is generally not locally-coded in an error resistant-fashion, as it is too small. To provide error detection and recovery, several mark-holders generally will contain the same part of the payload.

Fig. 9A illustrates the use of a keyed watermarking algorithm to implement the strong mark described above. Referring to Fig. 9A, a predefined payload is inserted into the signal using, e.g., a standard keyed watermarking algorithm (902, 904). Once the watermark has been inserted, the key is discarded or stored in a secure location (906). The watermarking algorithm is tuned empirically such that a statistically significant mark hit rate can be obtained even if an incorrect key is used to retrieve the mark. Although this will typically not enable direct retrieval of the payload from each of the mark holders, the hit rate (i.e., the number of payload-containing mark candidates divided by the total number of candidates that are examined) will be significant enough to allow a decision to be made as to whether the signal was watermarked, which is sufficient for purposes of implementing the strong mark described above.

Fig. 9B provides a more detailed illustration of a technique for detecting a strong-watermark inserted in the manner described in connection with Fig. 9A. Referring to Fig. 9B, a set of random keys is generated for use in retrieving the payload inserted by the keyed watermark algorithm (910). Each one of the keys is  
5 used to retrieve a "payload," which will generally not be the same as the payload inserted at block 904 of Fig. 9A since the random key used to retrieve the payload will typically not be the same as the key used to insert the payload (912 - 918). The results of the retrieval process are stored (916), and once each key has been used, the retrieved "payloads" are statistically analyzed for randomness (920). If the  
10 randomness level is less than a predefined threshold (922) (the threshold typically being determined during the tuning process described above), the signal is deemed to contain the strong watermark (926).

Since the identity of the actual mark-holders is unknown, as is the identity of the sub-set of mark holders examined by the watermark verifier, it will be difficult for  
15 an attacker to destroy the watermark, as that will generally entail the modification of all of the potential mark-holders candidates in the set, which will typically degrade signal quality unacceptably.

In a preferred embodiment the strong watermarking techniques described above are combined with the techniques described in connection with Figs. 4A - 8 to  
20 provide two levels of protection against unauthorized modifications. The operation of such an embodiment is illustrated in Figs. 10 and 11. Referring to Fig. 10, an input PCM signal is received by encoding system 102 (1002). Encoding system 102 inserts a strong watermark into the signal (1004). Next, the signal is parsed into  $N$  blocks (1006), and a comparatively weak watermark is embedded in each block (1010), the watermark containing the signature 1020 of the preceding watermark block, a guess  
25 1022 for use in identifying block boundaries, and, if compression is being used, an indication of the number of relevant bits in the PCM signal 1024. After this signature-containing watermark has been inserted, the signature of the watermarked block is determined (1012), so that it can be inserted into the next block.

30 Fig. 11 illustrates the operation of a decoder/player 104 upon receipt of a signal that has been processed in the manner shown in Fig. 10. Referring to Fig. 11, each block of data in the signal is checked for the presence of a signature-containing watermark (1106). If this watermark is not found (i.e., a "no" exit from block 1108), then the input signal is searched for the presence of the strong mark (1120). If the

strong mark is not found (a “no” exit from block 1122), then the signal is accepted, as the signal is likely to be content that was never registered (e.g., preexisting music files or legacy software). If the strong mark is found, then appropriate defensive action is taken (1126) – for example, further use of the signal can be inhibited and/or invalid  
5 data can be output – as the presence of the strong watermark, in combination with the absence of the signature-containing watermark, indicates that the content was registered at one point but was subsequently corrupted or modified. It should be appreciated, however, that any suitable response may be taken upon the detection of preexisting and/or corrupted content.

10 If the signature-containing watermark is found (i.e., a “yes” exit from block 1108), the signature is extracted from the watermark (1110). The signature is then verified (1112) using, e.g., the registration authority’s public key, which is preferably embedded in decoder/player 104. If the signature is determined to be authentic, then the corresponding block can be played or otherwise output to the user, and processing  
15 continues with the next block of the signal (1114). However, if the signature is not authentic, then decoding system 104 checks for the presence of the strong mark as described above or takes appropriate defensive action (as might be the case if other signature-containing watermarks have already been extracted from the signal, thus indicating that the signal is registered and obviating the need to look for the strong  
20 mark) (1120 - 1126).

While Figs. 10 and 11 illustrate the use of the strong watermarking scheme of the present invention in combination with the watermarking and signature techniques described in connection with Figs. 4 - 8, it should be appreciated that the strong watermarking scheme can be used in connection with virtually any other encoding  
25 scheme to provide multi-level content protection. For example, without limitation, the strong watermarking techniques of the present invention can be layered on top of the encoding scheme shown in Fig. 3, or the signed progression of hash values described in commonly-assigned U.S. Patent Application No. 09/543,750, filed April 5, 2000 and entitled “Systems and Methods for Authenticating and Protecting the  
30 Integrity of Data Streams and Other Data,” which is hereby incorporated by reference.

### Content Management

While parts of the foregoing discussion have focused on systems and methods for detecting unauthorized modifications to electronic content, it will be appreciated that the techniques described herein are readily adaptable for broader application. For example, the watermarking and signature techniques described above can also be used to explicitly convey content management information. In particular, the techniques described herein can provide increased efficiency and functionality to existing content control schemes. Figs. 12A, 12B, and 12C provide a comparison of the functionality offered by a conventional watermark-based content management scheme (shown in Fig. 12A) and the functionality offered by two exemplary embodiments of the present invention (shown in Figs. 12B and 12C).

Fig. 12A illustrates the operation of a conventional scheme for managing content via a watermark. Content that the owner wishes to prevent from being copied is marked with a strong watermark. Content that the owner wishes to allow to be copied is not marked. When a consumer attempts to copy content from or onto a device that supports this content management scheme, the content is checked for the presence of the strong mark. If the strong mark is detected, the copying operation is not allowed (1202). If the mark is not detected, the copying operation is allowed to proceed (1204).

A problem with the conventional content management scheme is that checking for the strong mark can be relatively time-consuming and/or computationally expensive. The conventional content management scheme is also unable to detect unauthorized modifications to the content. The systems and methods of the present invention can be used to solve both of these problems.

Fig. 12B illustrates the operation of a content management scheme in accordance with one embodiment of the present invention. Content that the owner wishes to allow to be copied is encoded with a strong mark and one or more signature-containing marks, as described above in connection with Figs. 4 - 11. When a user attempts to make a copy of the content file, the file is checked for the presence of the signature-containing watermark(s). If the mark(s) are found, they are used to verify the authenticity of the file. If the verification process determines that the file is authentic, the copying operation is allowed to proceed (1206); otherwise, the copying operation fails (1208). If, on the other hand, the signature-containing mark is not found, the content can be checked for the presence of the strong mark. If the strong



mark is found, the copying operation is prevented (1210). If the strong mark is not found, the copying operation is allowed to proceed (1212). Thus, the present invention enables some content management decisions to be made without checking for the presence of the strong mark, and makes it possible to verify the integrity of the file before authorizing its use. In addition, and as described in connection with Figs. 9 - 11, this encoding scheme provides protection against unauthorized modification or removal of the signature-containing watermarks, and also supports the secure use of content that is not encoded in accordance with this content management scheme (e.g., legacy content).

It will be appreciated that there are many variations of this exemplary scheme that can be practiced without departing from the principles of the present invention. For example, content encoded with the signature-containing watermark need not be encoded with the strong mark. While such an encoding scheme would, without further modification, be unable to detect the removal of the signature-containing watermark, this scheme would be more compatible with the conventional encoding scheme shown in Fig. 12A, in which a strong mark is only inserted in content that is not to be copied. Similarly, the content management mechanisms described herein are readily adaptable to systems in which the presence of the strong mark is interpreted as a permission to copy the file, rather than as a prohibition. Moreover, it will be appreciated that although for purposes of explanation various content management mechanisms are being described in the context of controlling the copying of content from one location to another, these content management mechanisms can be just as easily used to control or manage operations other than, or in addition to, copying – such as printing, viewing, moving, or otherwise accessing, using, manipulating, and/or transmitting content.

Figs. 12C and 13 illustrate the operation of another exemplary content management scheme that can be implemented using the techniques described herein. Content is first encoded with a strong watermark using the conventional technique described in connection with Fig. 12A. Hashes of the content are signed by the content owner or distributor and provided separately to the user (e.g., packaged as a separate file on a CD, made available for downloading on a server accessible over the Internet, etc.). As shown in Fig. 13, when a consumer attempts to copy a file (1302), the appropriate set of signed hashes are retrieved (1304, 1306). The authenticity of the hashes is verified, e.g., by decrypting the signature with the issuer's public key

and comparing the decrypted result to a hash of the signed hashes (1308). If the hashes are authentic (i.e., a “yes” exit from block 1310), they are used to verify the authenticity of the content file, e.g., by hashing the appropriate portions of the content file and comparing those hashes with the signed hashes (1312). If the content file is authentic (i.e., a “yes” exit from block 1314), the copying operation is allowed to proceed (1214, 1322). Otherwise, copying is prevented (1216, 1320). If the file containing the signed hashes cannot be located (i.e., a “no” exit from block 1306), then the content management decision can be made in the conventional manner by checking the content for the presence of the strong mark (1316) and preventing copying if the mark is found (i.e., a “yes” exit from block 1318)(1218), or permitting copying if the mark is not found (i.e., a “no” exit from block 1318)(1220). Thus, the content management scheme shown in Fig. 12C can be used with content that has already been encoded using the conventional mechanism of Fig. 12A. The content management scheme of Fig. 12C can be offered as an add-on to users of content encoded using the conventional mechanism, the add-on having the advantage of offering consumers a way to avoid performing the time-consuming check for the strong watermark, and providing content owners with an extra level of content protection (namely, an integrity check of the content before copying is allowed). In sum, the content management scheme of Fig. 12C allows a time-consuming part of the content management process—namely, checking for the strong watermark—to be effectively performed in advance.

Figs. 14 and 15 illustrate additional aspects of the content management mechanism described in connection with Fig. 12C and 13. As shown in Fig. 14, in a preferred embodiment the signed hash file 1400 is similar to the shared signature discussed in connection with Fig. 8. The hash file 1400 preferably includes a plurality of hash values 1402 obtained by hashing portions of the original content file. The hash file also preferably includes a plurality of hints (or guesses) 1404 that can be used to find potential matches for the hash values 1402 in the manner described above in connection with Figs. 6A and 6B. The hash file may also contain a quality indicator 1406 that specifies the number of bits in each of the content samples that should be considered when authenticating the file, as previously described in connection with Figs. 7A and 7B. Finally, the signed hash file contains the digital signature 1408 of the hashes 1402, hints 1404, and quality indicator 1406. The digital signature can be formed using any suitable one of the well-known digital signature

techniques, and typically comprises a hash (1420) of a combination of the hashes 1402, hints 1404, and quality indicator(s) 1406, the hash being encrypted (1422) using the issuer's private key (or secret key as appropriate) 1410. In another embodiment the hints and the quality indicator are not signed. Thus, the systems and methods of

5 the present invention enable nuanced and fault-tolerant decisions to be made regarding whether to allow use of a partially-corrupted signal. Specifically, by using hints 1404 and quality indicators 1406, as described previously herein, the content management system can allow a predetermined portion or percentage of the hash comparisons to fail before determining that the file is unauthentic. Thus, the systems

10 and methods of the present invention are well-suited for use in situations where even data that have not been tampered with may not be bit-for-bit identical with the original data.

Content owners, authorized distributors, or the like can make signed hash files 1400 available for the content files that they wish to permit to be copied. These

15 signed hash files 1400 can be stored on CDs or other media along with the content to which they relate. Alternatively, or in addition, signed hash files 1400 can be made accessible over a network such as the Internet, or can be provided to the content user in any other suitable manner. Because the hashes 1402 contained in a signed hash file 1400 are signed with the private key 1410 of the content owner or

20 distributor, the integrity of the authorization process will enjoy the same level of security as the encryption technique that is used. Thus, by choosing an appropriate key-length, it can be made computationally infeasible for an attacker to re-create the content owner's private key and provide phony hash files for a corrupted version of the content, or to provide dummy hash files for content that the owner has chosen not

25 to create such hash files for (e.g., because the content owner does not wish to allow the content to be copied).

Fig. 15 illustrates a system and method for using the content management mechanism of Figs. 12C, 13, and 14 to manage content in a networked environment. Consumers 1520, 1522, and 1524 obtain content from e.g., CDs 1512, networked

30 servers 1508, or other consumers. When a consumer 1522 attempts to copy content 1530 to another device (such as portable device 1532), content-management module 1534 first performs the procedure described in connection with Figs. 12C and 13 to determine if the copying operation should be allowed. Specifically, content management module 1534 checks for a signed hash file 1514 corresponding to

content 1530. For example, content management module 1534 may connect to server 1506 to obtain hash file 1514 (and possibly other metadata associated with the content file, such as an index of its contents, the name of its producer, and so forth). Content management module 1534 may also check its own local memory for the hash file  
5 1514, since hash file 1514 may have already been downloaded by the consumer if the consumer previously connected to server 1506 to obtain information about the content file. The content management module uses the signed hash file 1514 to control access to the file as shown in Fig. 13. If content management module 1534 is unable to find the appropriate signed hash file 1514, it checks for the presence of the strong  
10 watermark in a manner similar to that used by conventional content management mechanisms (i.e., blocks 1316 - 1322 of Fig. 13).

Similarly, when a consumer 1520 who is not connected to network 1504 wishes to copy a file from, e.g., CD 1512 to a hard disk 1536, portable device, or other location, content management module 1534 can look for the appropriate signed  
15 hash file on the CD and/or in the consumer's local memory. If it is not found there, the content management system searches for the strong watermark and grants or denies the consumer's request based on whether the strong mark is detected (i.e., blocks 1316 - 1322 of Fig. 13). As yet another example, a user 1524 who downloads a track 1510 from a server 1508 may obtain the corresponding file of signed hashes as  
20 part of the same transaction (or by separately connecting to server 1506). The user's content management system 1534 may verify the authenticity and permissions of the track before allowing the download to complete (e.g., before saving the file to the consumer's hard disk), and/or may save the hash file on the consumer's hard disk for later use in managing additional user operations.

25 Thus, systems and methods have been described for encoding a signal in manner that facilitates secure prevention of unauthorized use or modification. Attempts to remove the encoding can be detected and rendered ineffective, while attempts to use data that was never encoded in this manner can be detected and allowed. It should be appreciated that the systems and methods of the present  
30 invention can be used to implement a variety of content management and/or protection schemes. Although the foregoing invention has been described in some detail for purposes of clarity of understanding, it will be apparent that certain changes and modifications may be practiced within the scope of the appended claims. It should be noted that there are many alternative ways of implementing both the

methods and systems of the present invention. Accordingly, the present embodiments are to be considered as illustrative and not restrictive, and the invention is not to be limited to the details given herein, but may be modified within the scope and equivalents of the appended claims.

What Is Claimed Is:

1. A method for protecting a digital file against unauthorized modification,  
the method including:  
encoding the file, the encoding including:  
5                    inserting a first watermark into the file;  
                     inserting a plurality of signature-containing watermarks into the  
                     file, each signature-containing watermark containing the digital  
                     signature of at least a portion of the file; and  
decoding at least a portion of the encoded file, the decoding including:  
10                   searching at least a portion of the encoded file for a first  
                     signature-containing watermark;  
                     if the first signature-containing watermark is found, retrieving a  
                     first digital signature from the first signature-containing  
                     watermark, and using the first digital signature to verify the  
15                   authenticity of a portion of the encoded file to which the first  
                     digital signature corresponds;  
                     if the first signature-containing watermark is not found,  
                     searching the encoded file for the first watermark;  
                         if the first watermark is found, inhibiting at least one  
20                   use of at least a portion of the file;  
                         if the first watermark is not found, permitting at least  
                         one use of at least a portion of the file;  
whereby the plurality of signature-containing watermarks are operable  
to facilitate detection of modifications to the encoded file, and the first  
25                   watermark is operable to facilitate detection of removal of one or more  
                     of the signature-containing watermarks from the encoded file.
2. A method as in claim 1, in which inserting the plurality of signature-  
containing watermarks into the file includes:  
generating a first watermarked segment by inserting a second  
30                   signature-containing watermark into a first segment of the file;  
                     generating a first digital signature by encrypting a hash of at least a  
                     portion of the first watermarked segment; and  
                     generating a second watermarked segment by inserting the first  
                     signature-containing watermark into a second segment of the file,

wherein the first signature-containing watermark contains the first digital signature.

3. A method as in claim 2, in which the first signature-containing watermark further includes a multi-bit guess, and in which retrieving the first digital signature from the first signature-containing watermark and using the first digital signature to verify the authenticity of the portion of the encoded file to which the first digital signature corresponds further includes:
  - using the multi-bit guess to locate the portion of the first watermarked segment to which the first digital signature corresponds;
  - hashing the portion of the first watermarked segment to which the first digital signature corresponds to obtain a first hash value;
  - decrypting the first digital signature; and
  - comparing the first hash value with at least part of the decrypted first digital signature.
4. A method as in claim 2, in which the digital file comprises a series of multi-bit samples, and in which the first signature-containing watermark includes a quality indicator, the quality indicator specifying the number of bits in each multi-bit sample that should be considered when using the first digital signature to verify the authenticity of the portion of the encoded file to which the first digital signature corresponds.
5. A method as in claim 1, in which inserting the first watermark into the file includes:
  - analyzing the file to identify a first set of mark holder candidates;
  - using a key to select a sub-set of the first set of mark holder candidates into which to insert a predefined payload; and
  - inserting the predefined payload into the selected sub-set of mark holder candidates.
6. A method as in claim 5, in which searching the encoded file for the first watermark includes:
  - identifying a second set of mark holder candidates;
  - generating a predefined number of random keys;
  - using each random key to select a sub-set of the second set of mark holder candidates, and retrieving a payload from each selected sub-set;
  - recording the payload retrieved from each selected sub-set;

statistically analyzing the recorded payloads for randomness; and  
determining that the first watermark is present if the randomness is less  
than a predefined threshold.

- 5           7. A method for encoding an electronic file in a manner designed to facilitate  
detection of modifications to the file, the method including:  
            inserting a first hidden code into the file;  
            generating a plurality of modification-detection codes, each  
            modification-detection code corresponding, at least in part, to at least  
            one file segment; and  
10           inserting the plurality of modification-detection codes into the file,  
            wherein the plurality of modification-detection codes can be used to  
            detect modifications to the file segments to which they correspond, and  
            wherein the first hidden code can be used to detect removal of one or  
            more modification-detection codes from the file.
- 15           8. A method as in claim 7, in which the first hidden code comprises a  
            watermark.
9. A method as in claim 8, in which the plurality of modification-detection  
            codes are inserted into the file via a plurality of watermarks.
- 20           10. A method as in claim 9, in which the watermark containing the first hidden  
            code is more robust than the watermarks containing the plurality of  
            modification-detection codes.
11. A method as in claim 8, in which inserting the watermark includes:  
                analyzing the file to identify a set of mark holder candidates;  
                using a key to select a sub-set of the set of mark holder candidates into  
25              which to insert a predefined payload; and  
                inserting the predefined payload into the selected sub-set of mark  
                holder candidates.
12. A method as in claim 7, in which the plurality of modification-detection  
            codes comprise a plurality of digital signatures.
- 30           13. A method as in claim 7, in which the plurality of modification-detection  
            codes comprise a signed progression of hash values.
14. A method as in claim 7, in which the plurality of modification-detection  
            codes comprises a plurality of hash values, and in which inserting the  
            plurality of modification-detection codes into the file comprises:



concatenating a first group of modification-detection codes together to form a first combined modification-detection code;  
digitally signing the first combined modification-detection code; and  
inserting the signed first combined modification-detection code into  
the file.

15. A method as in claim 14, further including:

concatenating a second group of modification-detection codes to form a second combined modification-detection code;  
digitally signing the second combined modification-detection code;  
and  
inserting the signed second combined modification-detection code into the file.

16. A method for encoding a file of electronic data, the method including:

inserting a first watermark into a first portion of the file, the first watermark containing a payload that includes a digital signature for a second portion of the file; and  
inserting a second watermark into a third portion of the file, the second watermark containing a payload that includes a digital signature for the first portion of the file.

17. A method as in claim 16, in which the file of electronic data is selected from the group consisting of: a file of digital audio data, a file of video data, a file of textual data, a file of multimedia data, a software program.

18. A method for detecting modifications to an electronic file, the method including:

searching at least a portion of the electronic file for a first signature-containing watermark;  
if the first signature-containing watermark is found, retrieving a digital signature from the first signature-containing watermark, and using the digital signature to verify the authenticity of a portion of the electronic file to which the digital signature corresponds;  
if verification of the authenticity of the portion of the electronic file fails, inhibiting at least one use of at least part of the electronic file; and

if the first signature-containing watermark is not found, searching the electronic file for a second watermark;

if the second watermark is found, inhibiting at least one use of at least a portion of the electronic file;

5 if the second watermark is not found, permitting use of at least part of the electronic file.

19. A method as in claim 18, in which the first signature-containing watermark includes a guess, the method further including:

10 using the guess to locate the portion of the electronic file to which the digital signature corresponds.

20. A method as in claim 18, in which the electronic file comprises a series of multi-bit samples, and in which the first signature-containing watermark includes a quality indicator, the quality indicator specifying the number of bits in each multi-bit sample that should be included when using the digital signature to verify the authenticity of the portion of the electronic file to which the digital signature corresponds.

15 21. A method as in claim 18, in which the digital signature comprises an encrypted concatenation of a plurality of hash values, each hash value comprising the hash of a sub-portion of the portion of the electronic file to which the signature corresponds.

20 22. A method as in claim 21, in which using the digital signature to verify the authenticity of a portion of the electronic file includes:

25 decrypting the concatenation of hash values;  
computing a hash of a sub-portion of the electronic file; and  
comparing the computed hash with at least one of the plurality of hash values in the decrypted concatenation of hash values.

23. A method as in claim 18, in which searching the electronic file for the second watermark includes:

30 identifying a set of mark-holder candidates;  
generating a predefined number of random keys;  
retrieving a payload using each random key;  
statistically analyzing the retrieved payloads for randomness; and  
determining that the second watermark is present if the randomness of the retrieved payloads is less than a predefined threshold.

24. A computer program product for detecting modifications to an electronic file, the computer program product including:
- computer code for searching at least a portion of the electronic file for a first signature-containing watermark;
  - 5 computer code for retrieving a digital signature from the first signature-containing watermark, and for using the digital signature to verify the authenticity of a portion of the electronic file to which the digital signature corresponds;
  - computer code for inhibiting at least one use of at least part of the electronic file if verification of the authenticity of the portion of the electronic file fails;
  - 10 computer code for searching the electronic file for a second watermark if the first signature-containing watermark is not found;
  - computer code for inhibiting at least one use of at least part of the electronic file if the second watermark is found;
  - 15 computer code for permitting at least one use of at least part of the electronic file if the second watermark is not found; and
  - a computer-readable medium for storing the computer codes.
25. A computer program product as in claim 24, in which the digital signature comprises an encrypted concatenation of a plurality of hash values, each hash value comprising the hash of a sub-portion of the portion of the electronic file to which the signature corresponds, and in which the computer code for using the digital signature to verify the authenticity of a portion of the electronic file includes:
- 20 computer code for decrypting the concatenation of hash values;
  - computer code for generating a hash of a sub-portion of the electronic file;
  - computer code for comparing the generated hash with at least one of the plurality of hash values in the decrypted concatenation of hash values.
  - 25
  - 30
26. A method for authenticating electronic data, the method including:
- obtaining an authentication file associated with the electronic data, the authentication file containing a plurality of hash values and a plurality of hints;

- using a hint to search a predefined portion of the data for a first portion of the data that potentially corresponds to a first one of the plurality of hash values;
- 5 hashing the first portion of the data to obtain a hash of the first portion of data;
- comparing the hash of the first portion of the data with the first one of the plurality of hash values;
- 10 if the hash of the first portion of the data is not equal to the first one of the plurality of hash values, using the hint to locate a second portion of the data that potentially corresponds to the first one of the plurality of hash values;
- hashing the second portion of the data to obtain a hash of the second portion of data; and
- 15 comparing the hash of the second portion of the data with the first one of the plurality of hash values.
27. A system for providing access to an electronic file, the system including:
- a memory unit for storing portions of the electronic file;
- a processing unit;
- 20 a data retrieval unit for loading a portion of the electronic file into the memory unit;
- a first watermark detection engine for detecting a signature-containing watermark in the electronic file, and for retrieving a digital signature associated with the watermark;
- 25 a signature verification engine for verifying the integrity a portion of the electronic file using a digital signature;
- a second watermark detection engine for detecting a strong watermark in the electronic file; and
- 30 a file handling unit for granting a user access to at least part of the electronic file upon successful verification of the integrity of said part of the electronic file by the signature verification engine, or upon failure to detect the presence of a signature-containing watermark by the first watermark-detection engine and failure to detect the strong watermark by the second watermark detection engine.

28. A system as in claim 27, in which the first and second watermark detection engines comprise software executed by the processing unit.

29. A method of detecting modifications to an electronic file, the method including:

5           encoding the electronic file by applying a first content protection technique and a second content protection technique, whereby the encoded file includes at least a first detectable characteristic and a second detectable characteristic, the first detectable characteristic indicating the application of the first content protection technique and  
10           the second detectable characteristic indicating the application of the second content protection technique;  
          storing the encoded file on a computer readable storage medium;  
          loading at least a portion of the encoded file into system memory of a decoding device;  
15           checking the encoded file for the presence of the second detectable characteristic; and  
          if the second detectable characteristic is not found, checking the encoded file for the presence of the first detectable characteristic and inhibiting at least one use of at least a portion of the encoded file if the  
20           first detectable characteristic is found.

30. A method as in claim 29, in which encoding the electronic file by applying a first content protection technique includes watermarking the electronic file using a strong watermarking algorithm.

25           31. A method as in claim 30, in which watermarking the electronic file using a strong watermarking algorithm includes:

          analyzing the electronic file to identify a set of mark holder candidates;  
          using a key to select a sub-set of the set of mark holder candidates into which to insert a predefined payload; and  
          inserting the predefined payload into the selected sub-set of mark  
30           holder candidates.

32. A method as in claim 30, in which checking the encoded file for the presence of the first detectable characteristic includes:

          identifying a set of mark holder candidates;  
          generating a predefined number of random keys;

using each random key to select a sub-set of mark holder candidates from which to retrieve a payload, and retrieving a payload from each selected sub-set of mark holder candidates;  
statistically analyzing the retrieved payloads for randomness; and  
5 determining that the first detectable characteristic is present if the randomness is less than a predefined threshold.

33. A method as in claim 29, in which applying a second content protection technique includes inserting a plurality of signature-containing watermarks into the file.

10 34. A method as in claim 33, in which inserting the plurality of signature-containing watermarks into the file includes:  
generating a first watermarked segment by inserting a first signature-containing watermark into a first segment of the file;  
generating a first digital signature by encrypting a hash of at least a  
15 portion of the first watermarked segment; and  
generating a second watermarked segment by inserting a second signature-containing watermark into a second segment of the file, wherein the second signature-containing watermark includes the first digital signature.

20 35. A method for encoding data to facilitate detection of modifications to the data, the method including:  
generating a first watermarked segment by inserting a first watermark into a first segment of the data;  
compressing the first watermarked segment using a predefined  
25 compression algorithm;  
decompressing the compressed first watermarked segment;  
generating a first signature by encrypting a hash of at least a portion of the decompressed first watermarked segment;  
generating a second watermarked segment by inserting a second  
30 watermark into a second segment of the data, wherein the second watermark includes the first signature;  
compressing the second watermarked segment using the predefined compression algorithm; and

transmitting the compressed first watermarked segment and the compressed second watermarked segment to a computer readable storage medium.

5 36. A method as in claim 35, in which the first watermark includes a signature of at least a portion of a previously-watermarked segment of the data.

37. A method as in claim 35, further including:  
decompressing the compressed second watermarked segment;  
generating a second signature by encrypting a hash of at least a portion  
of the decompressed second watermarked segment;  
10 generating a third watermarked segment by inserting a third watermark into a third segment of the data, wherein the third watermark includes the second signature;  
compressing the third watermarked segment using the predefined compression algorithm; and  
15 transmitting the third watermarked segment to the computer readable storage medium.

38. A method as in claim 35, further including:  
retrieving the first watermarked segment and the second watermarked  
segment from the computer readable storage medium;  
20 decompressing the first watermarked segment and the second watermarked segment;  
detecting the second watermark;  
extracting the first signature from the second watermark; and  
using the first signature to verify the authenticity of the portion of the  
25 decompressed first watermarked segment to which the first signature corresponds.

39. A method as in claim 35, further including:  
inserting a strong watermark into the data, the strong watermark being  
operable to facilitate detection of removal of the first or second  
30 watermarks.

40. A method for managing at least one use of a file of electronic data, the method including:  
(a) receiving a request to use the file in a predefined manner;  
(b) searching the file for a signature-containing watermark;

(c) if the signature-containing watermark is found, extracting a digital signature from the signature-containing watermark;

(i) performing an authenticity check on at least a portion of the file using the digital signature;

5 (ii) granting the request to use the file in the predefined manner if the authenticity check is successful;

(d) if the signature-containing watermark is not found, searching the file for a predefined watermark; and

10 (e) if the predefined watermark is found, denying the request to use the file in the predefined manner.

41. A method as in claim 40, in which the predefined manner comprises moving the file or a copy thereof from one location to another.

42. A method for managing at least one use of a file of electronic data, the method including:

15 receiving a request to use the file in a predefined manner;  
retrieving at least one digital signature and at least one check value associated with the file;  
verifying the authenticity of the at least one check value using the digital signature;

20 verifying the authenticity of at least a portion of the file using the at least one check value; and  
granting the request to use the file in the predefined manner.

43. A method as in claim 42, in which the at least one check value comprises one or more hash values, and in which verifying the authenticity of at least  
25 a portion of the file using the at least one check value includes:

hashing at least a portion of the file to obtain a first hash value; and  
comparing the first hash value to at least one of the one or more hash values.

44. A method for managing the use of a file of electronic data by one or more  
30 consumers, the method including:

(a) creating an authentication file associated with the file of electronic data;

(b) receiving a request at a first consumer system to use the file of electronic data in a predefined manner;



- 5 (c) searching for the authentication file;  
(d) if the authentication file is found, using the authentication file to  
verify the authenticity of at least a portion of the file of electronic data;  
(e) if the authentication file is not found, searching the file of  
electronic data for a predefined watermark; and  
(f) granting the request to use the file of electronic data in the  
predefined manner.

45. A method as in claim 44, further including:

- 10 (a)(i) storing the authentication file at a networked server;  
(b)(ii) sending a request for the authentication file to the networked  
server.

46. A method as in claim 44, in which the authentication file comprises at least  
one digital signature and one or more hash values.

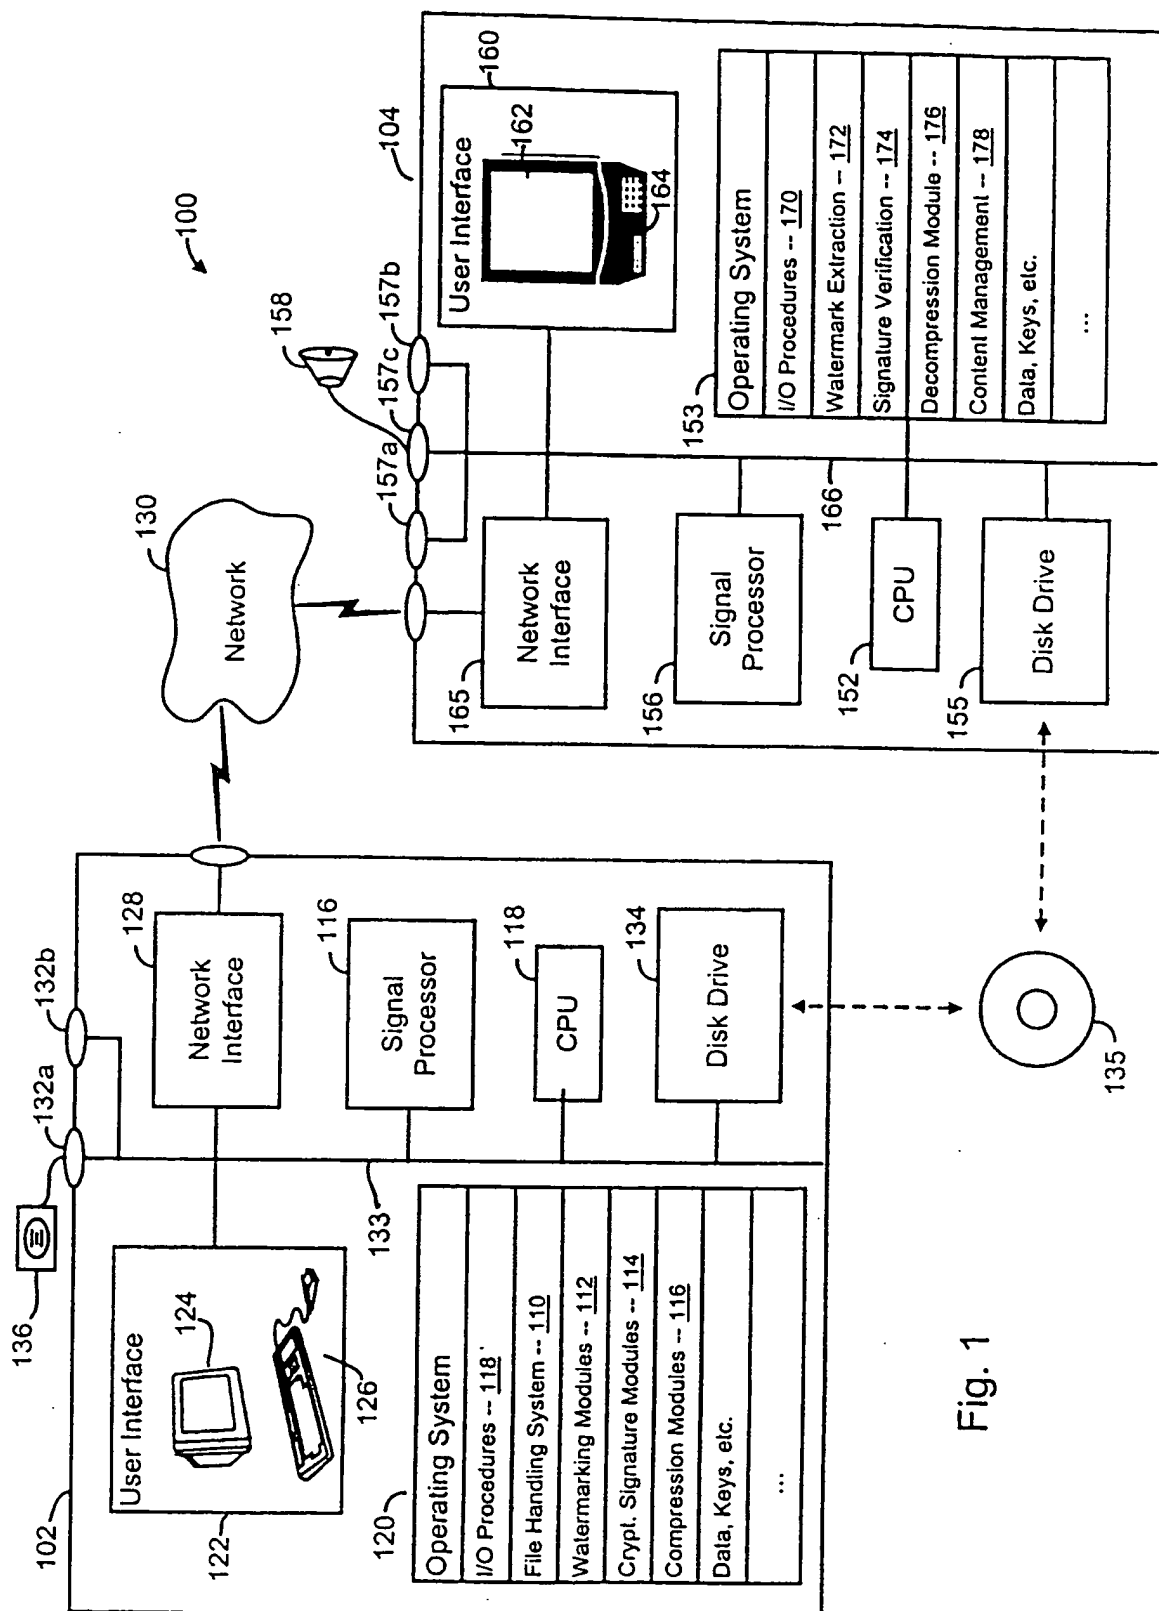


Fig. 1

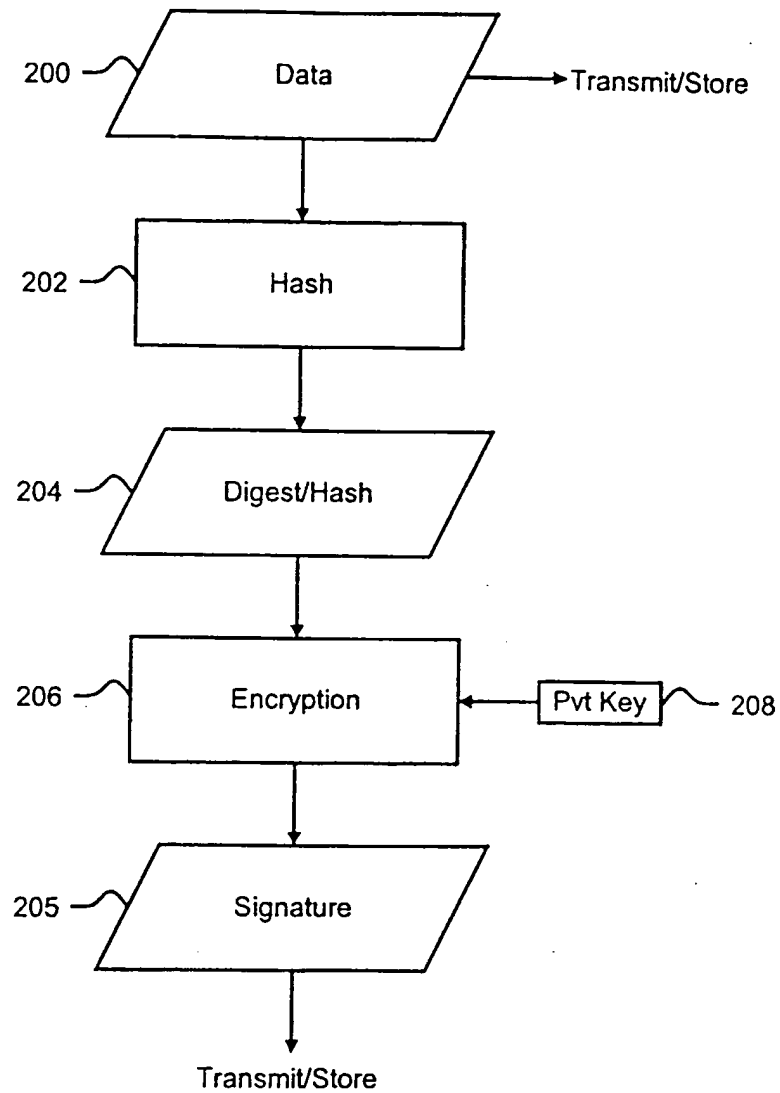


Fig. 2A

3/20

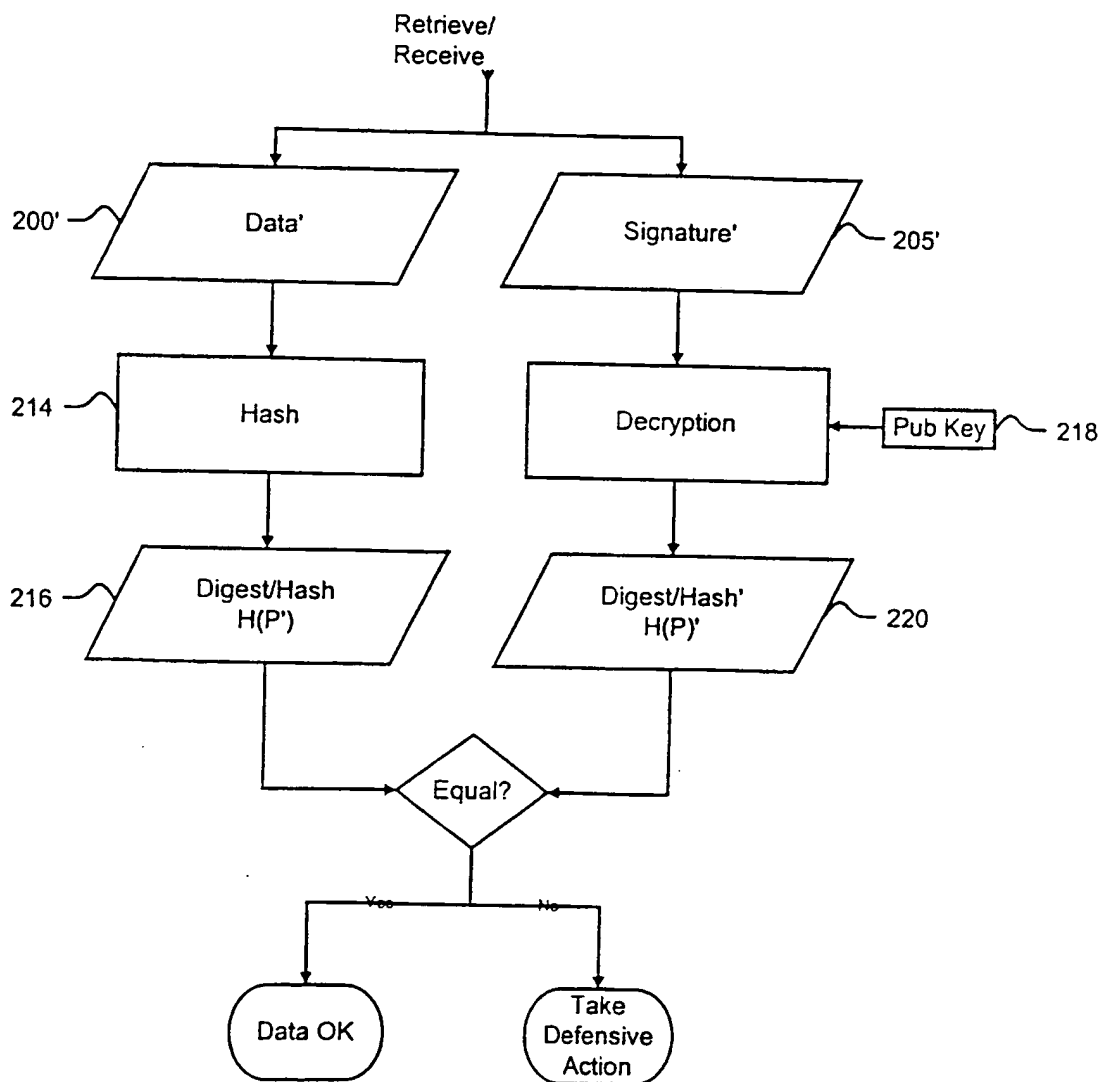


Fig. 2B

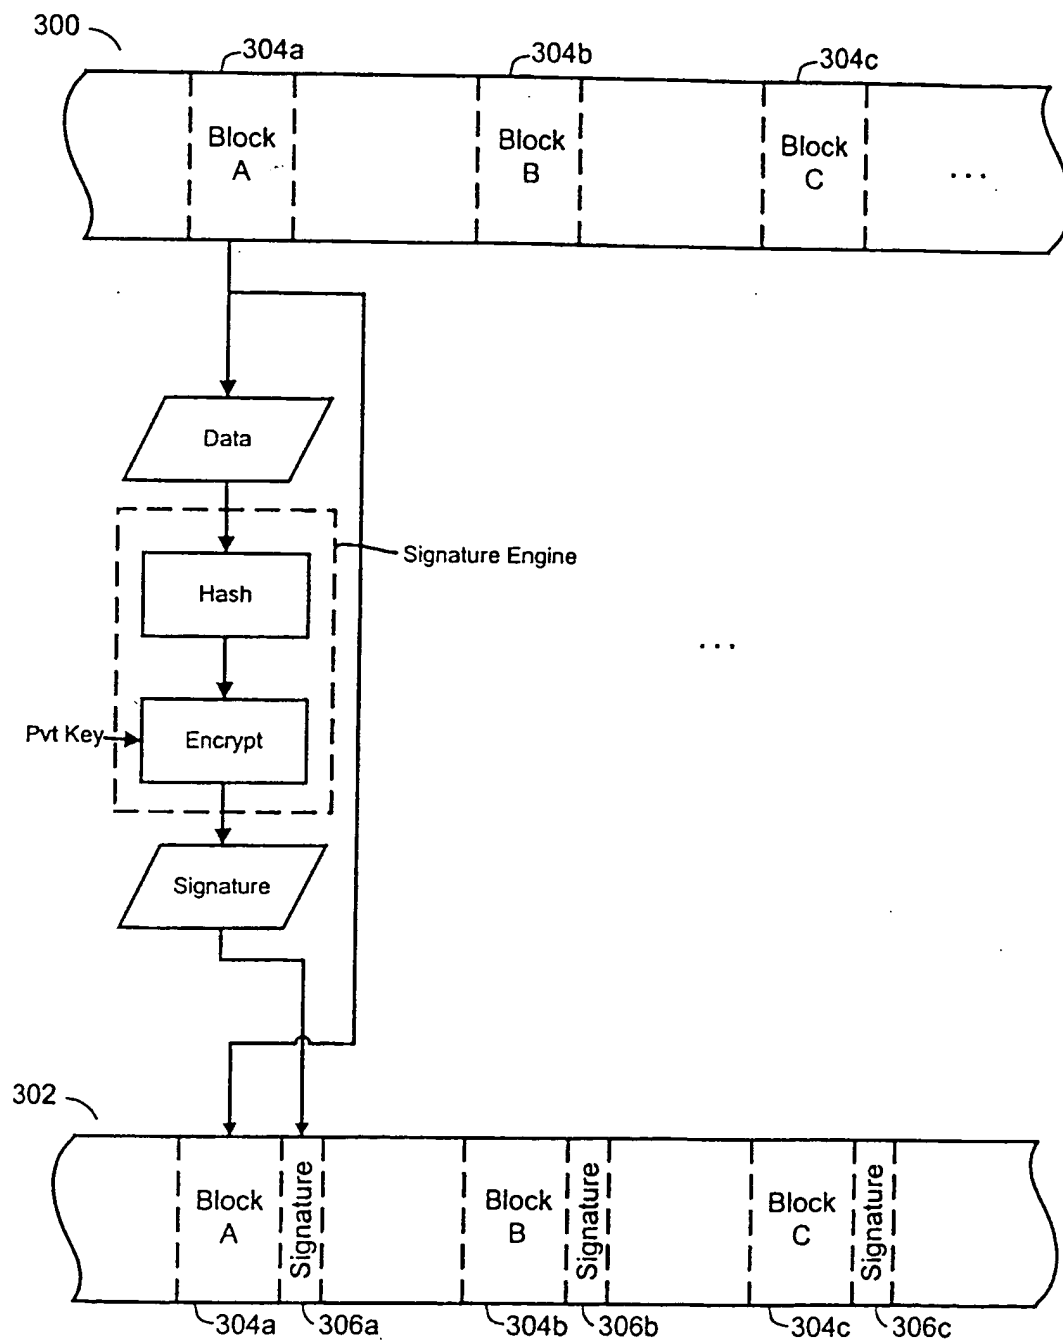


FIG. 3

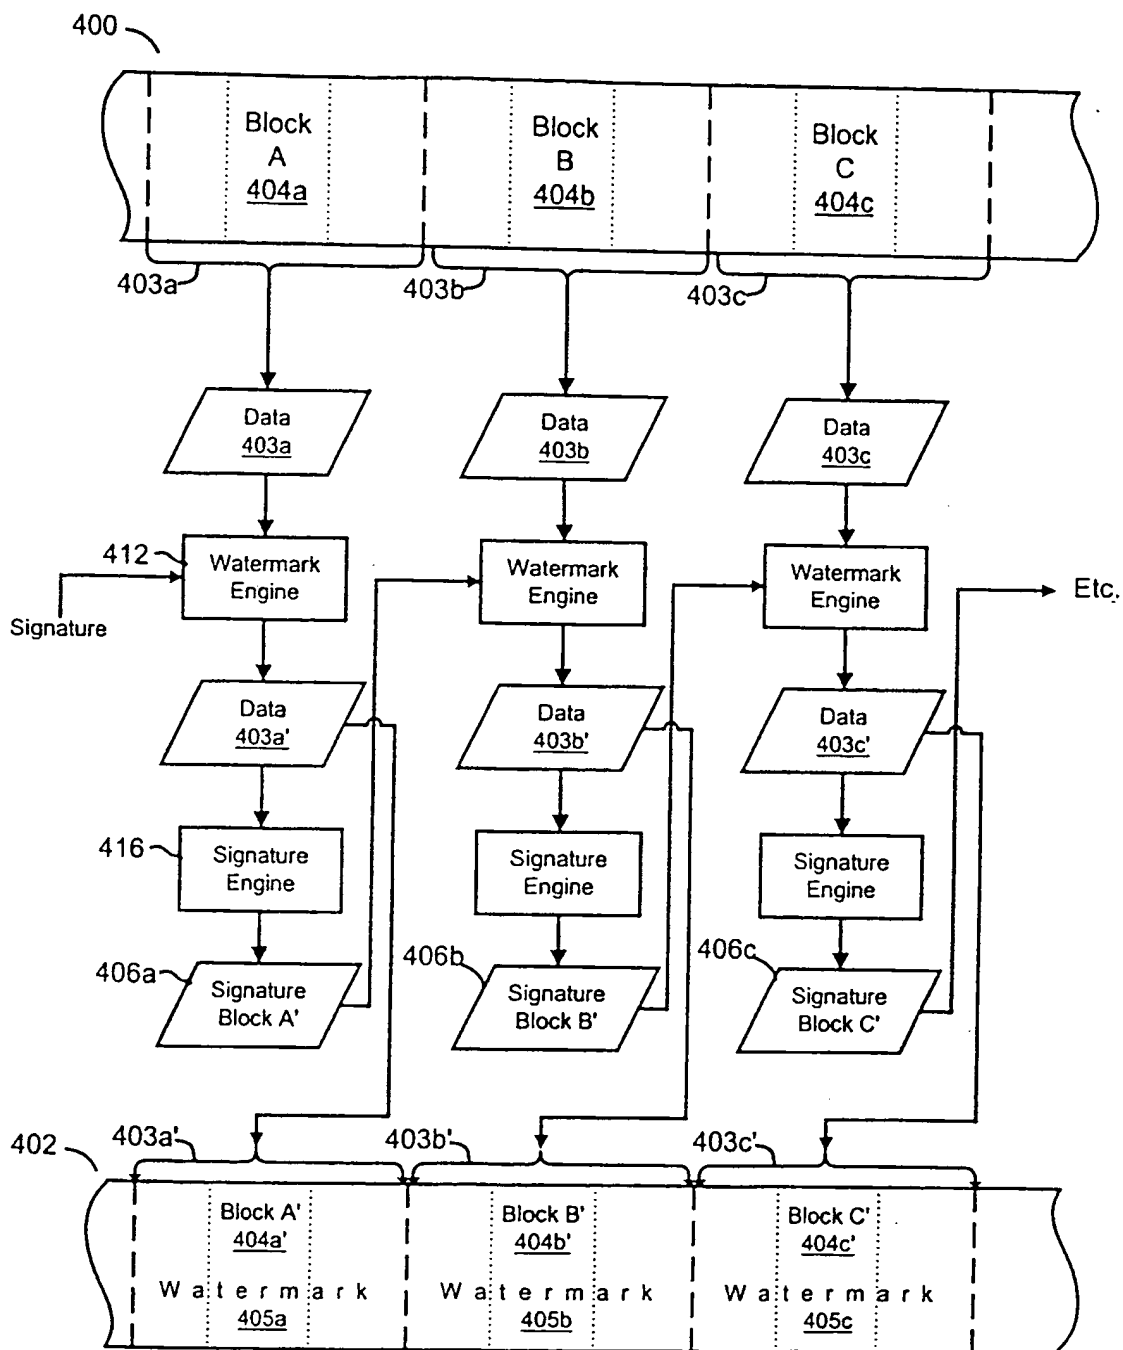


FIG. 4A

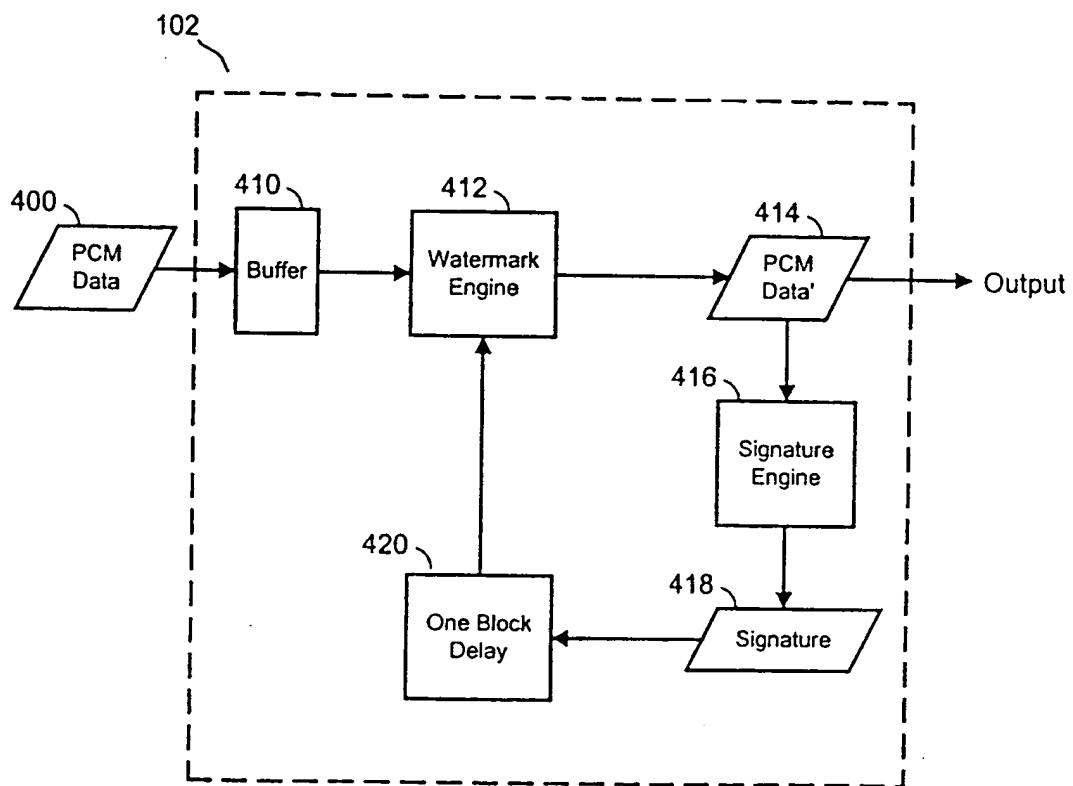


FIG. 4B

7/20

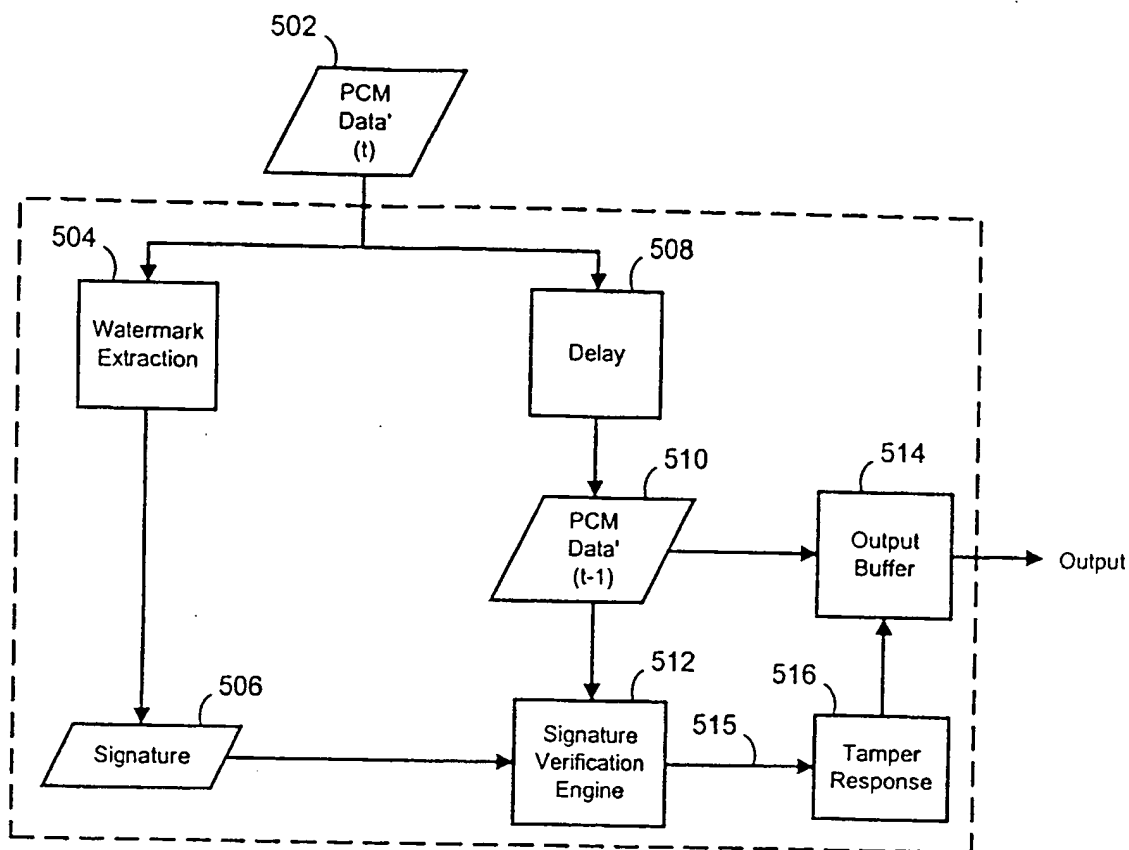


FIG. 5A

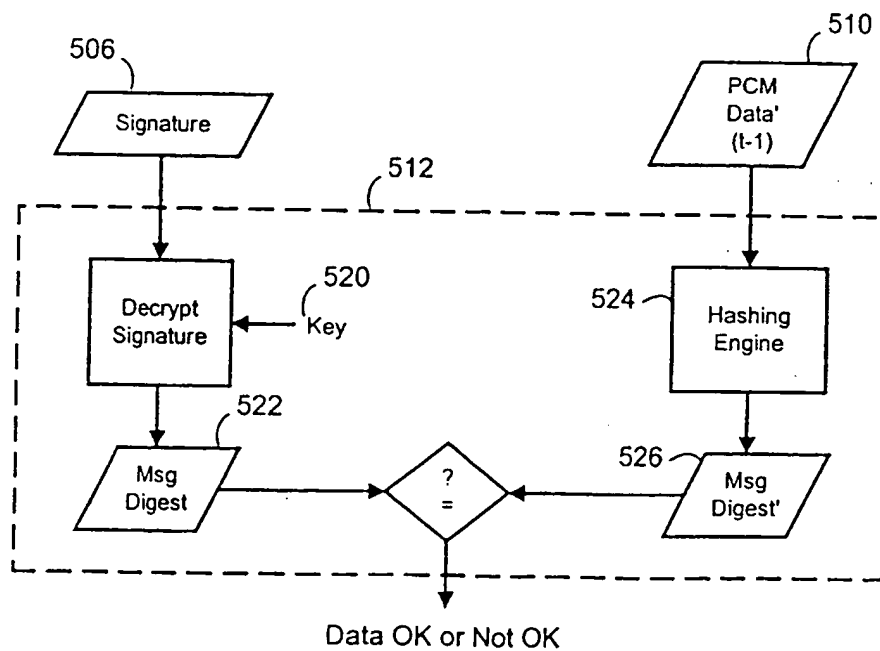


FIG. 5B



8/20

Signature Block 602

$$\begin{array}{cccc}
 0 & 1 & 0 & 1 \\
 1 & 1 & 0 & 0 \\
 1 & \otimes & 0 & \otimes \\
 0 & 1 & 0 & 0
 \end{array}
 =
 \begin{array}{c}
 0 \\
 0 \\
 0 \\
 1
 \end{array}
 \quad 603$$

FIG. 6A

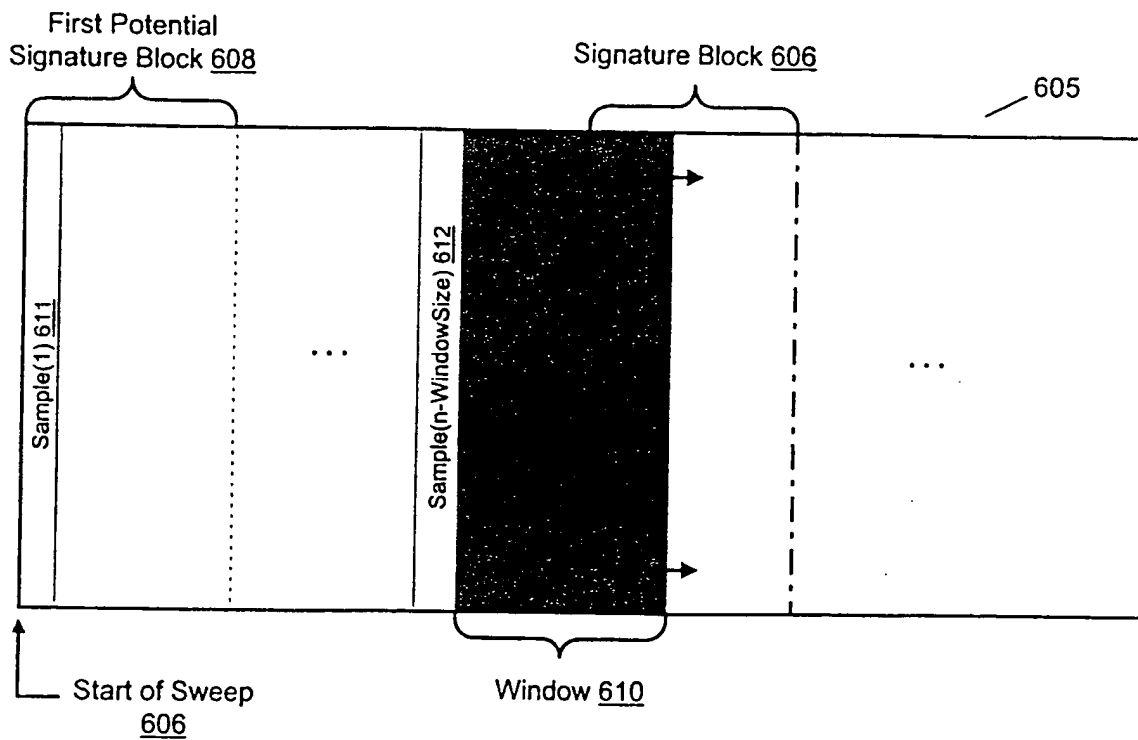


FIG. 6B

9/20

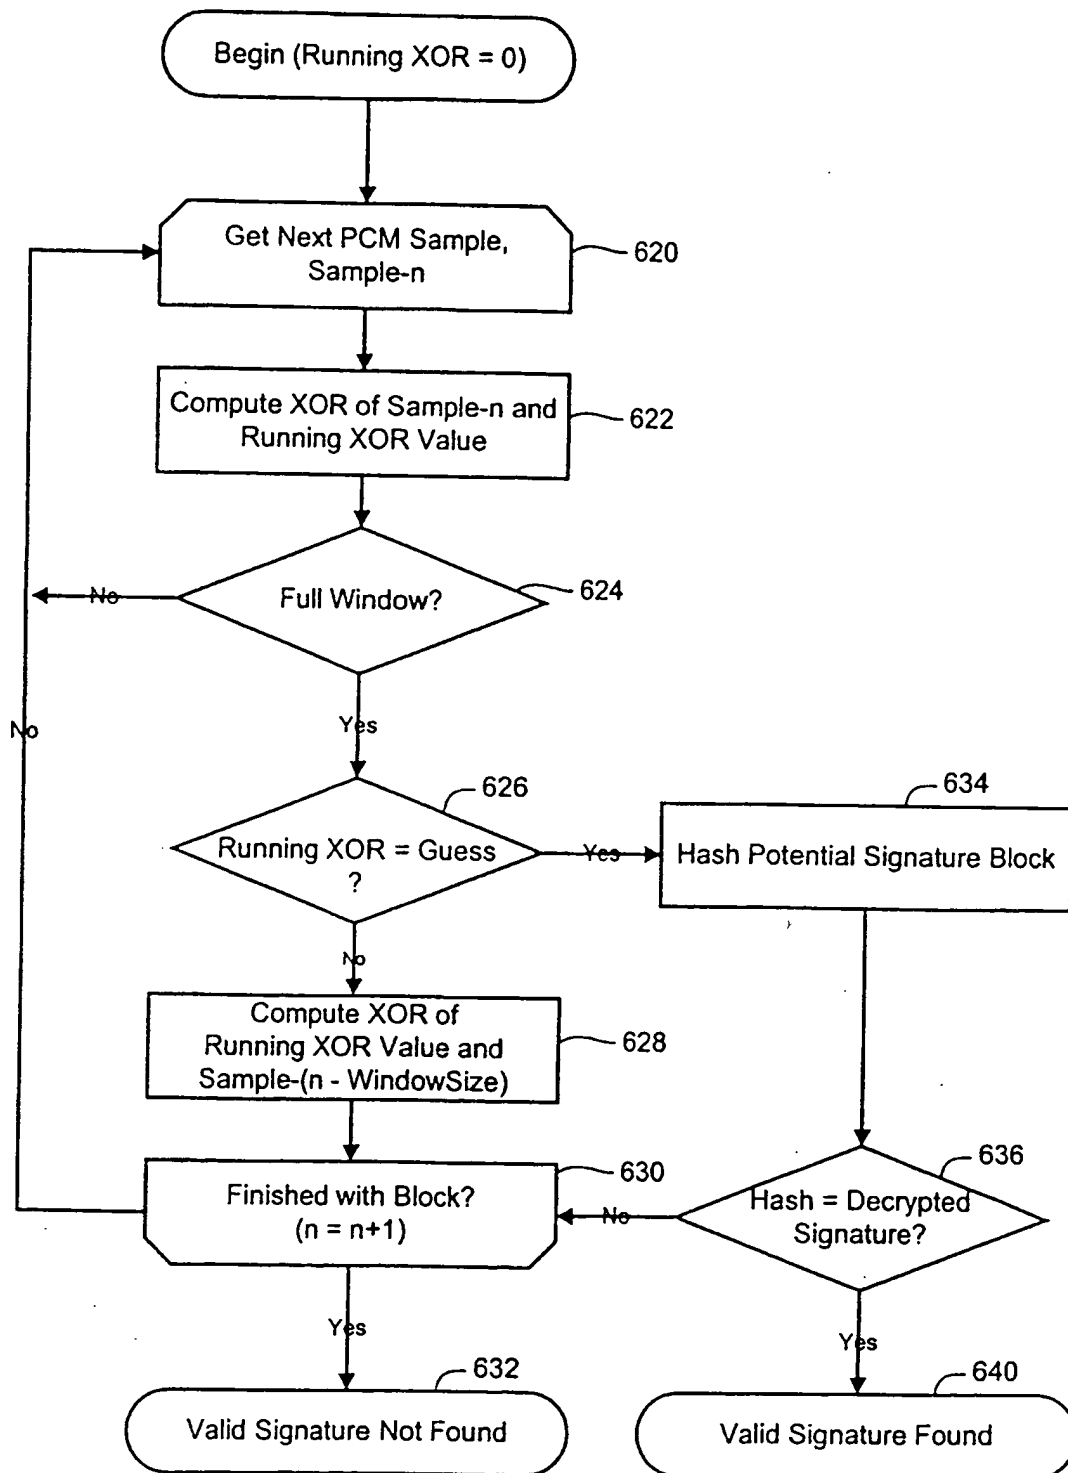


FIG. 6C

10/20

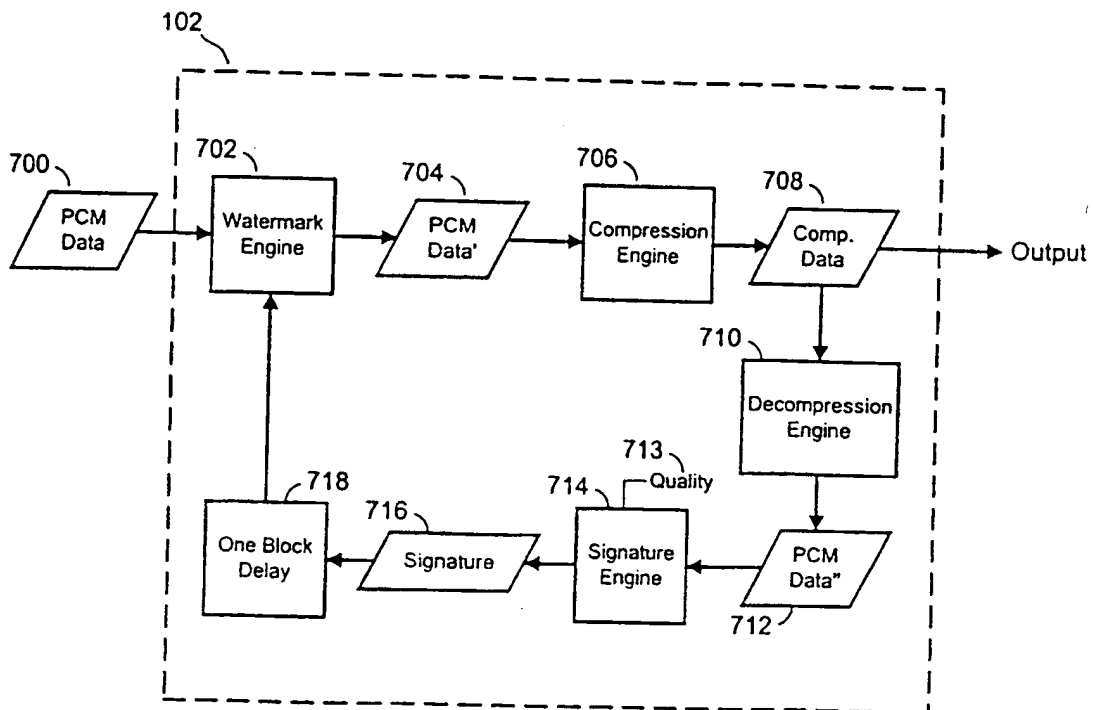


FIG. 7A

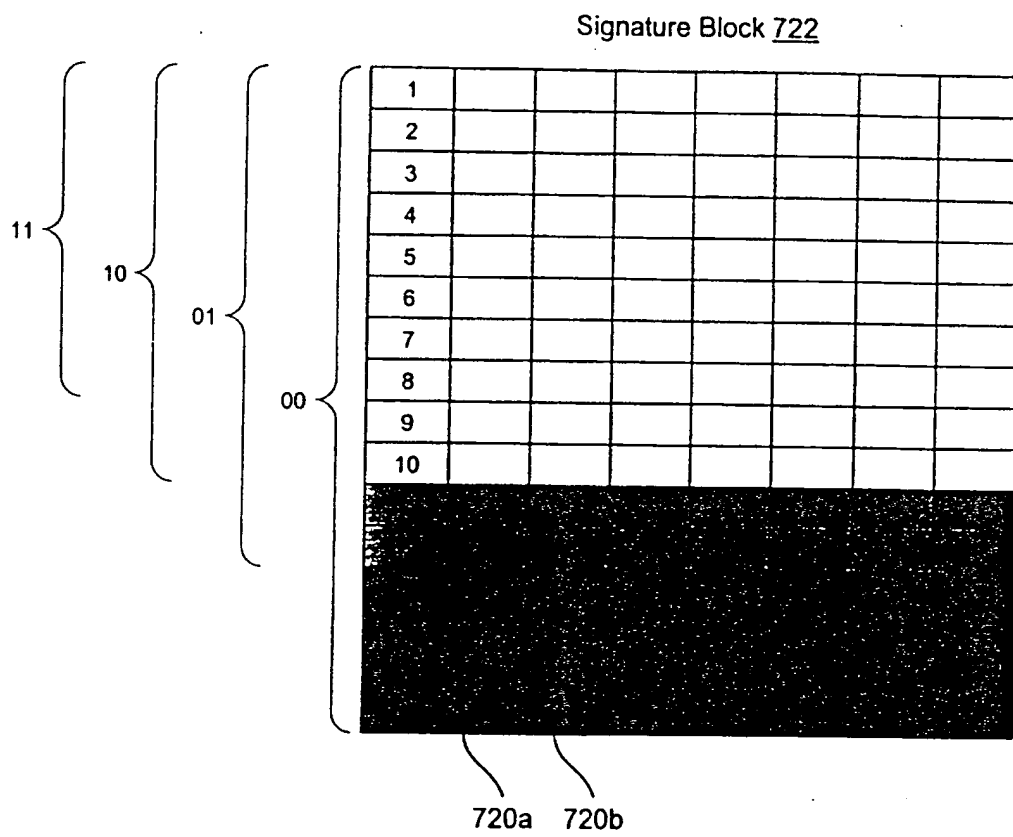


FIG. 7B

12/20

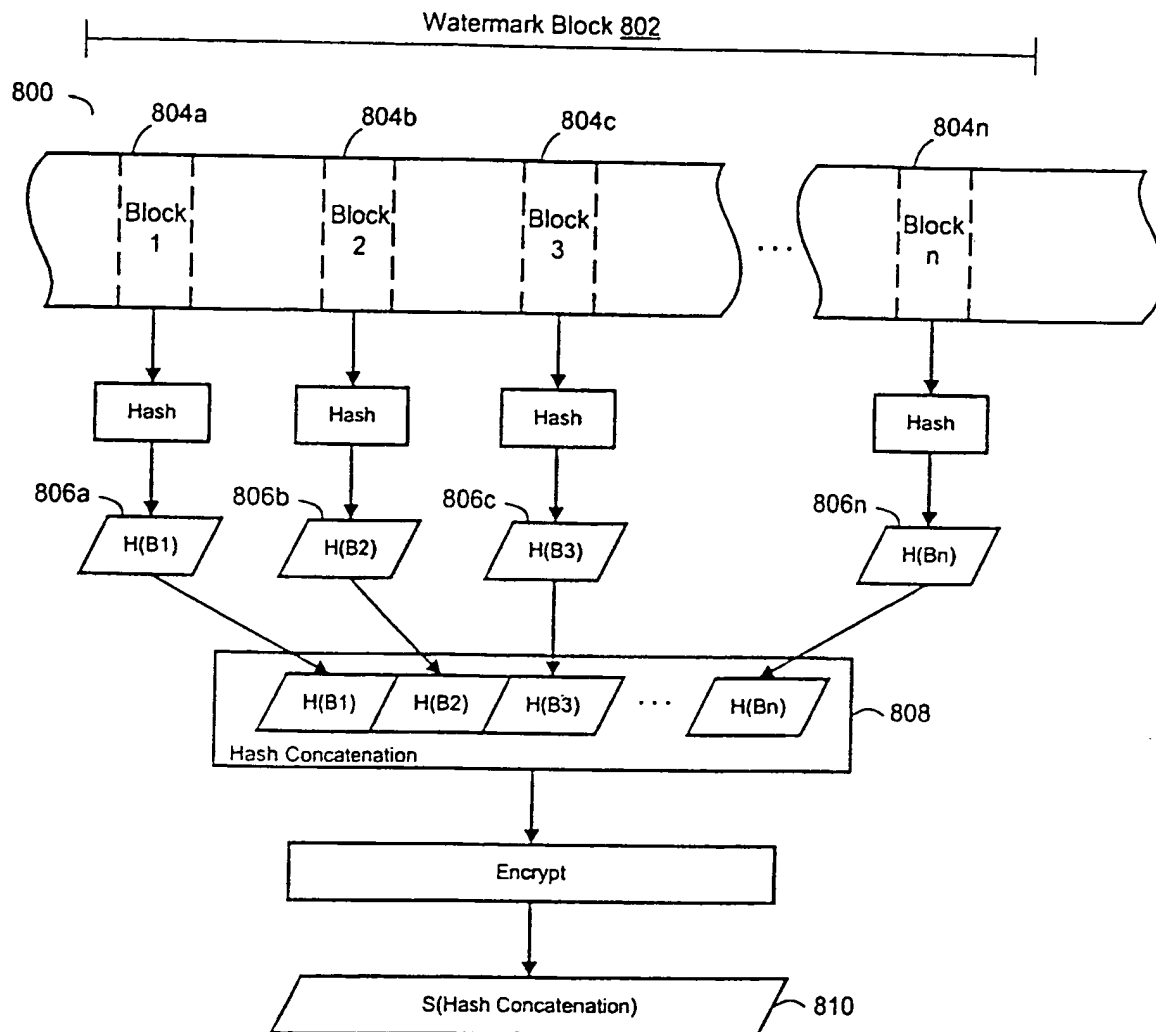


FIG. 8

13/20

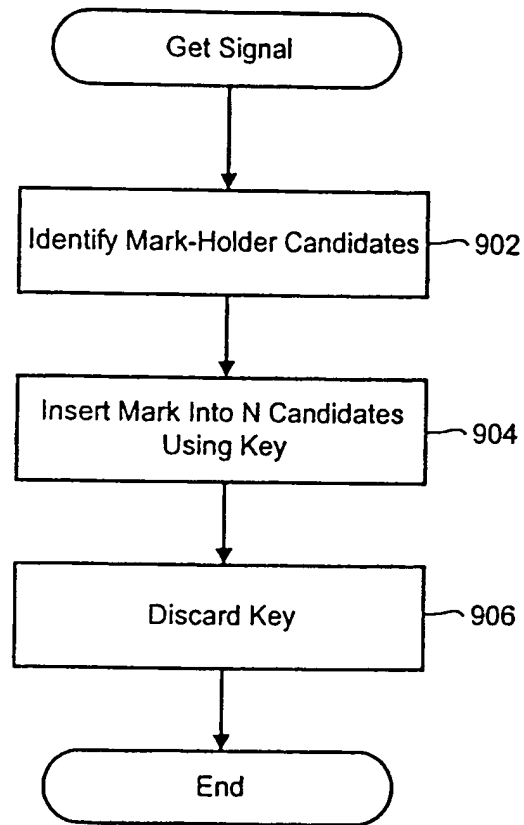


FIG. 9A

14/20

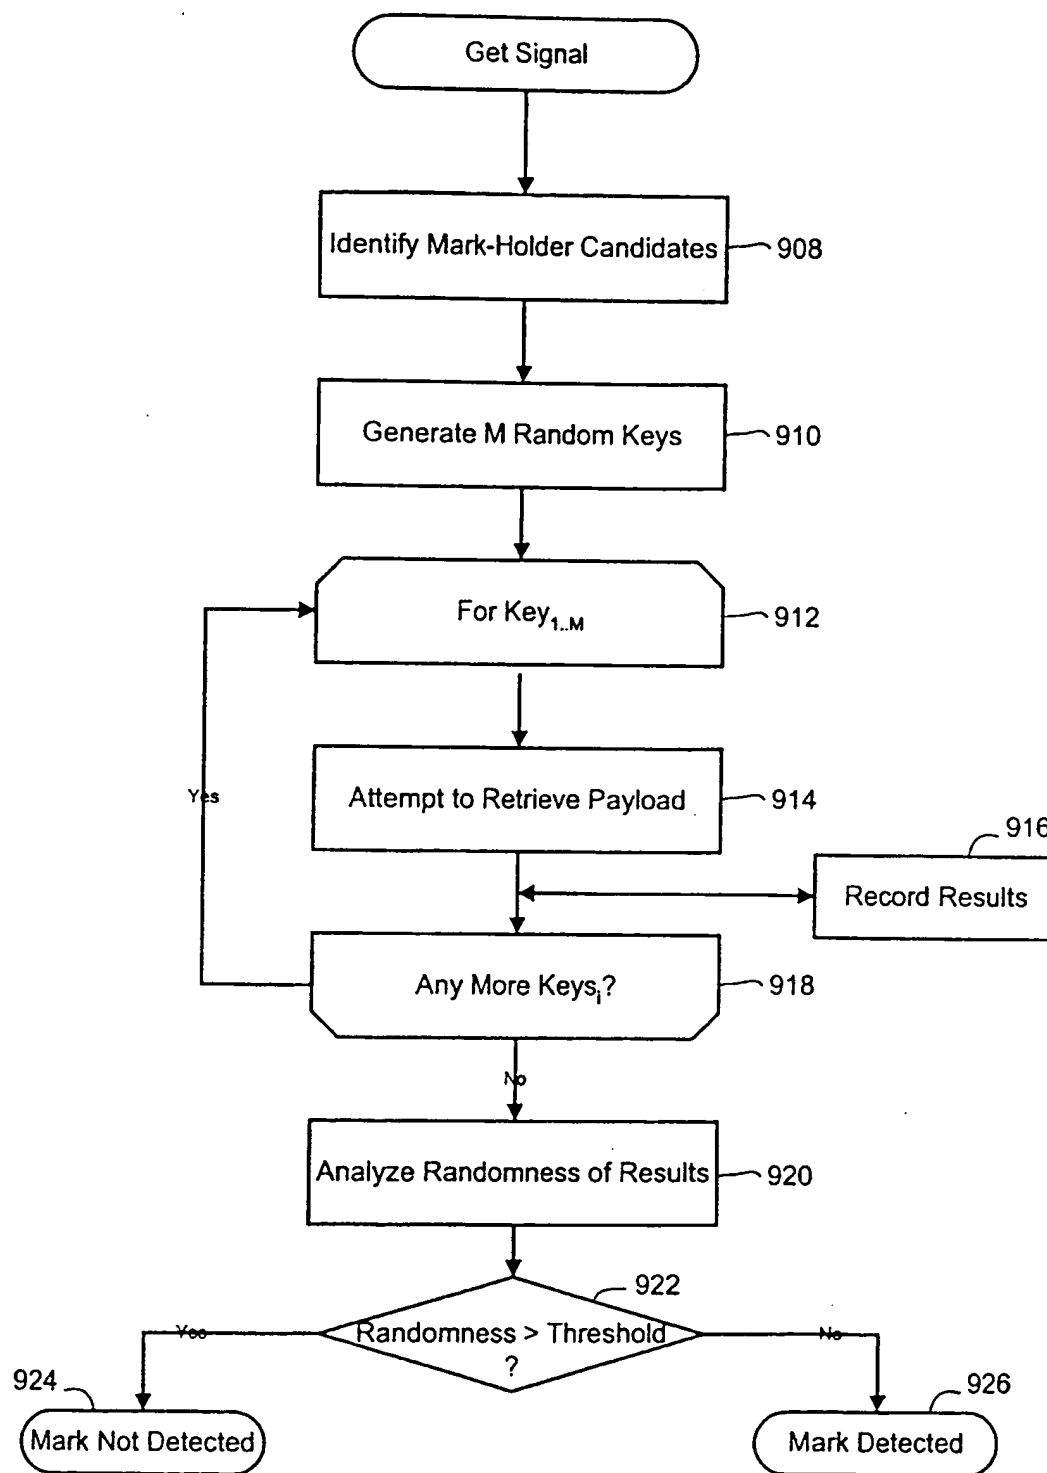


FIG. 9B

15/20

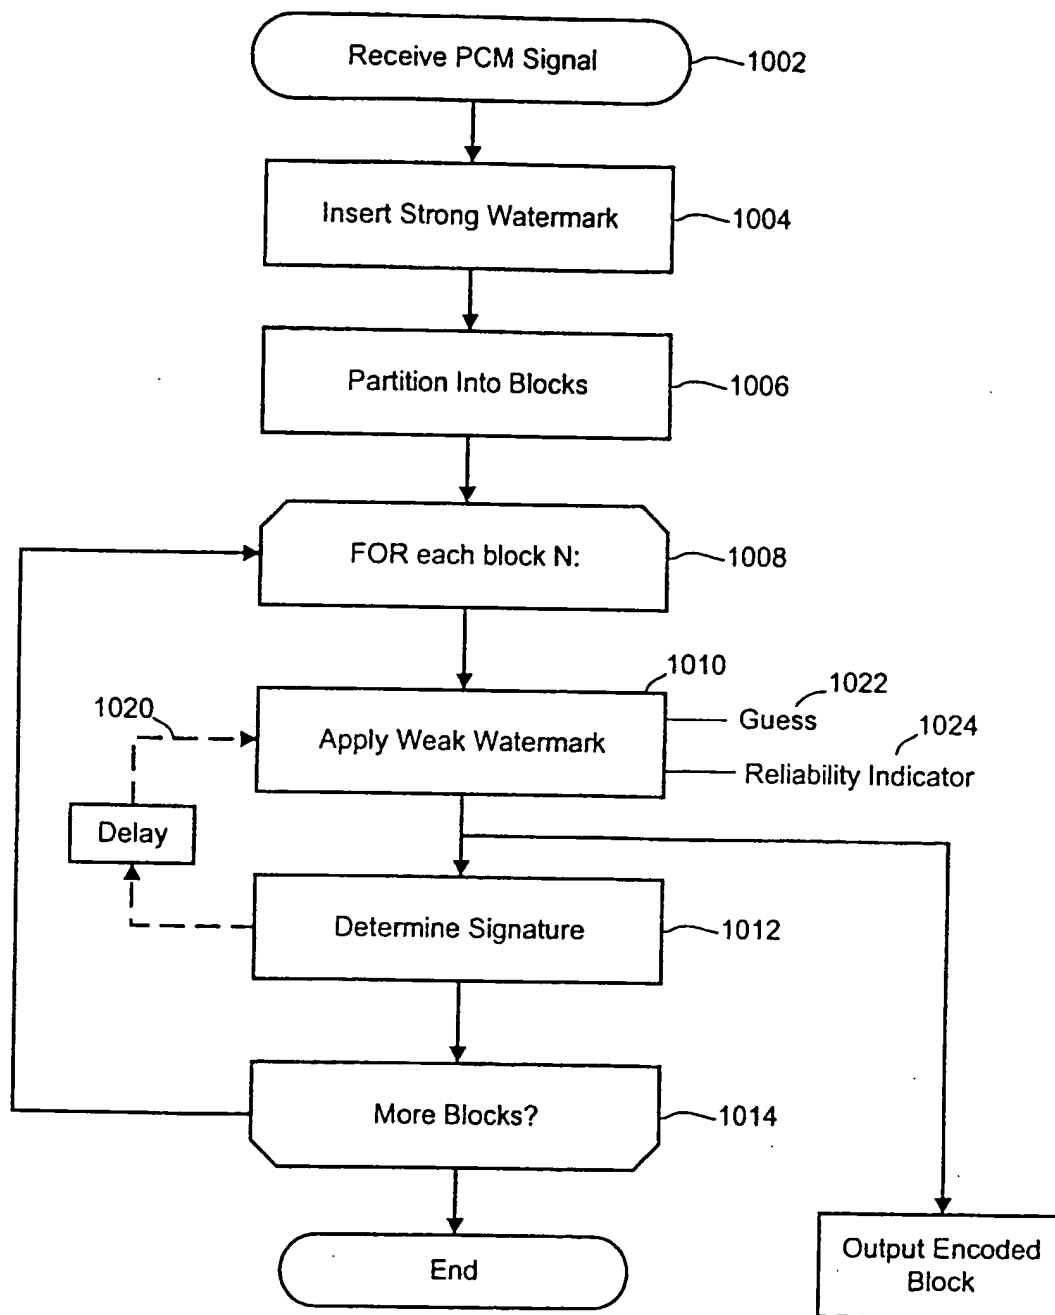


FIG. 10



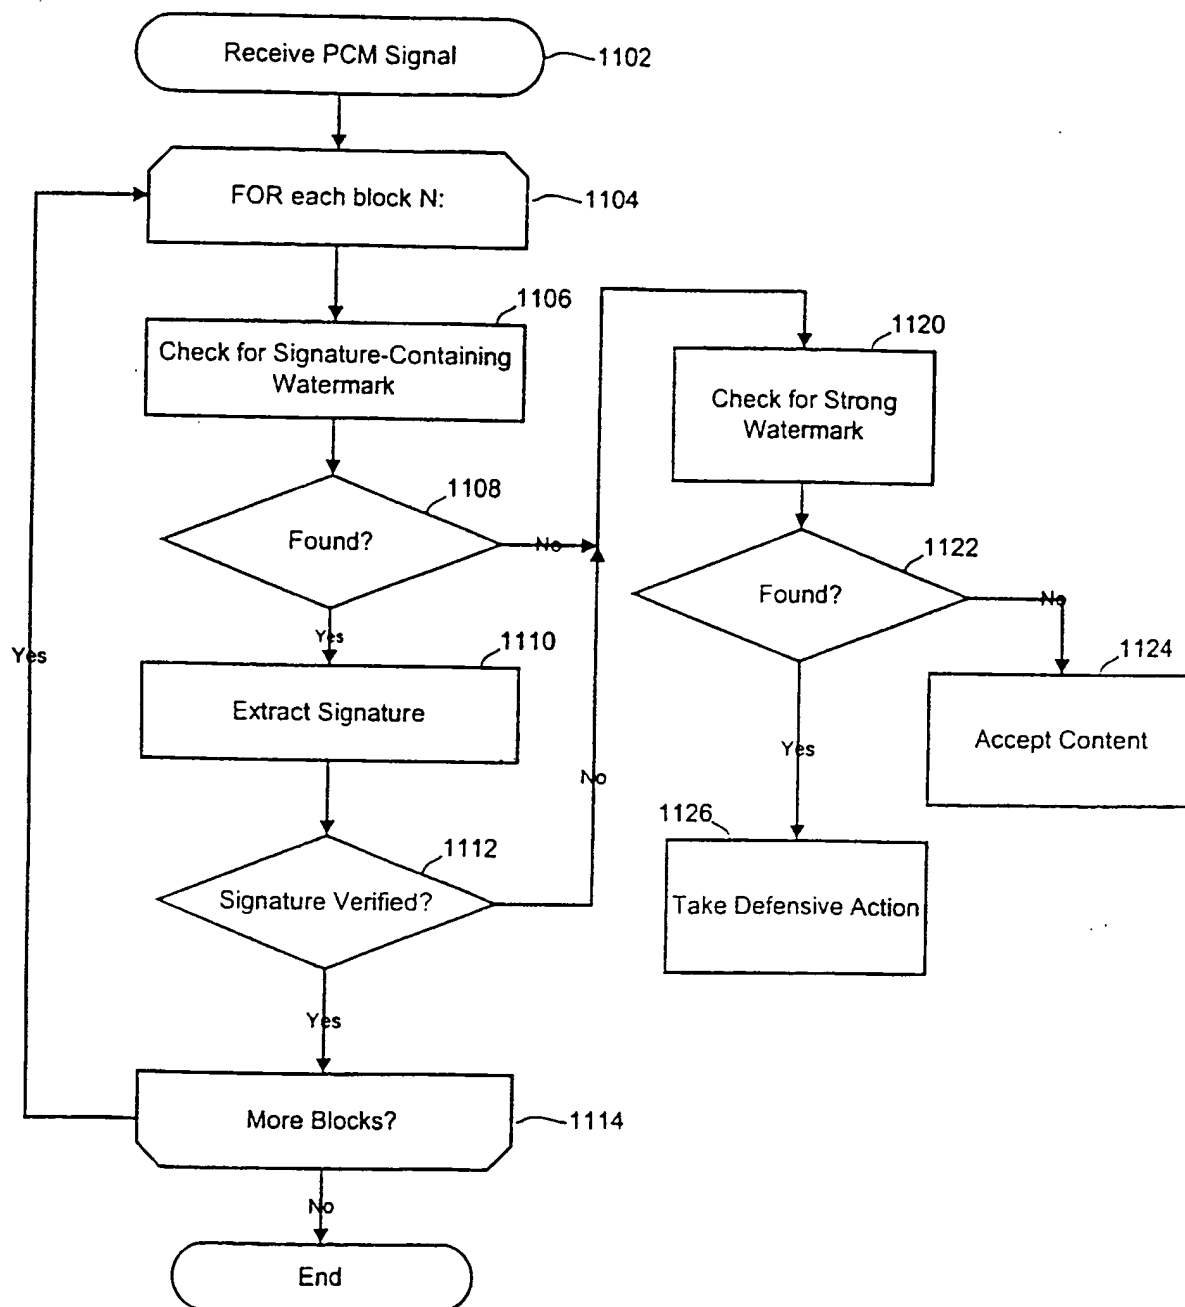


FIG. 11

17/20

	Mark	Result
1202	Detected	Prevent Copying
1204	Not Detected	Permit Copying

Fig. 12A

	Sig.-Containing Mark	Strong Mark	Result
1206	Found & Verified	Don't Care	Permit Copying
1208	Found & Not Verified	Don't Care	Prevent Copying
1210	Not Found	Detected	Prevent Copying
1212	Not Found	Not Detected	Permit Copying

Fig. 12B

	Signed Hashes	Strong Mark	Result
1214	Obtained & Verified	Don't Care	Permit Copying
1216	Obtained & Not Verified	Don't Care	Prevent Copying
1218	Not Obtained	Detected	Prevent Copying
1220	Not Obtained	Not Detected	Permit Copying

Fig. 12C

18/20

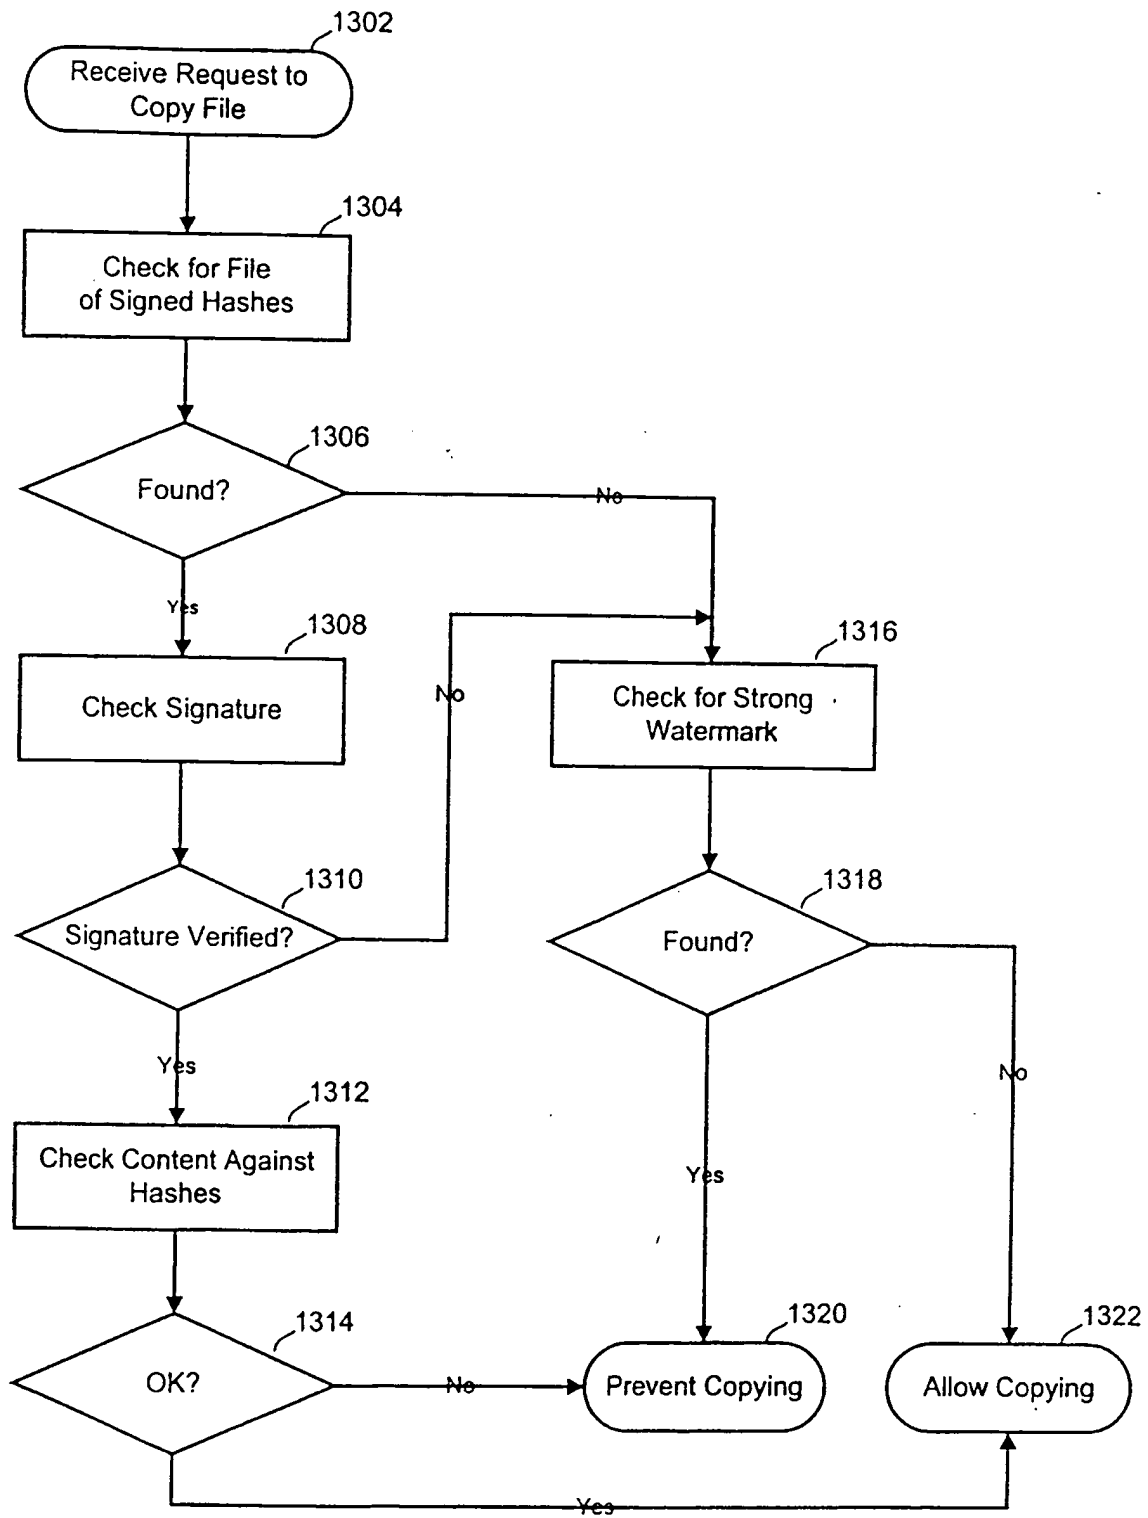


FIG. 13

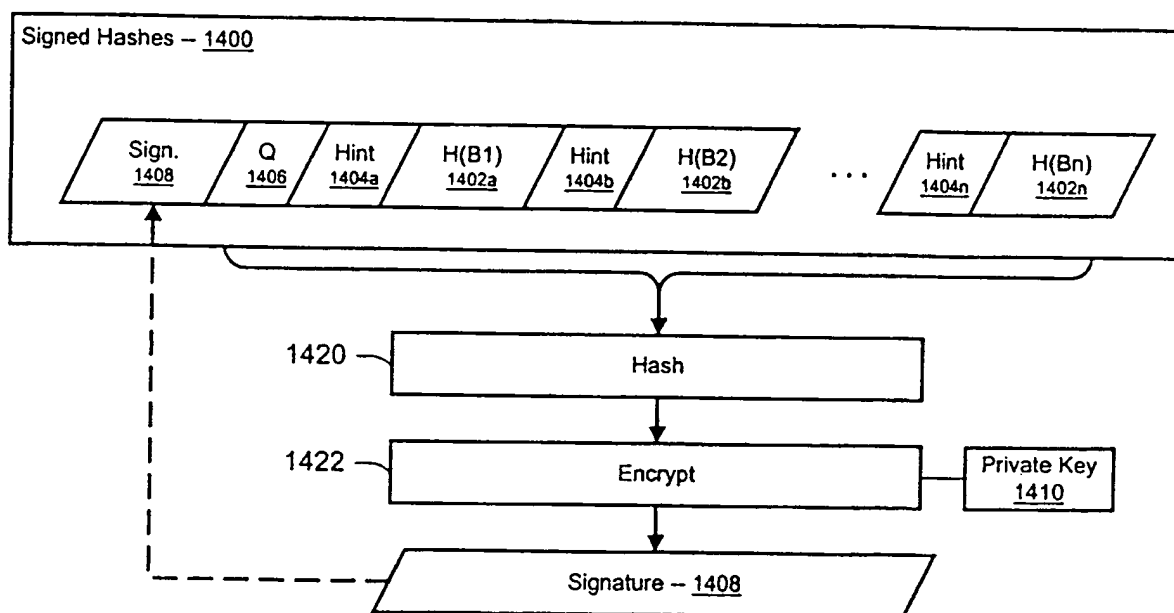


FIG. 14

20/20

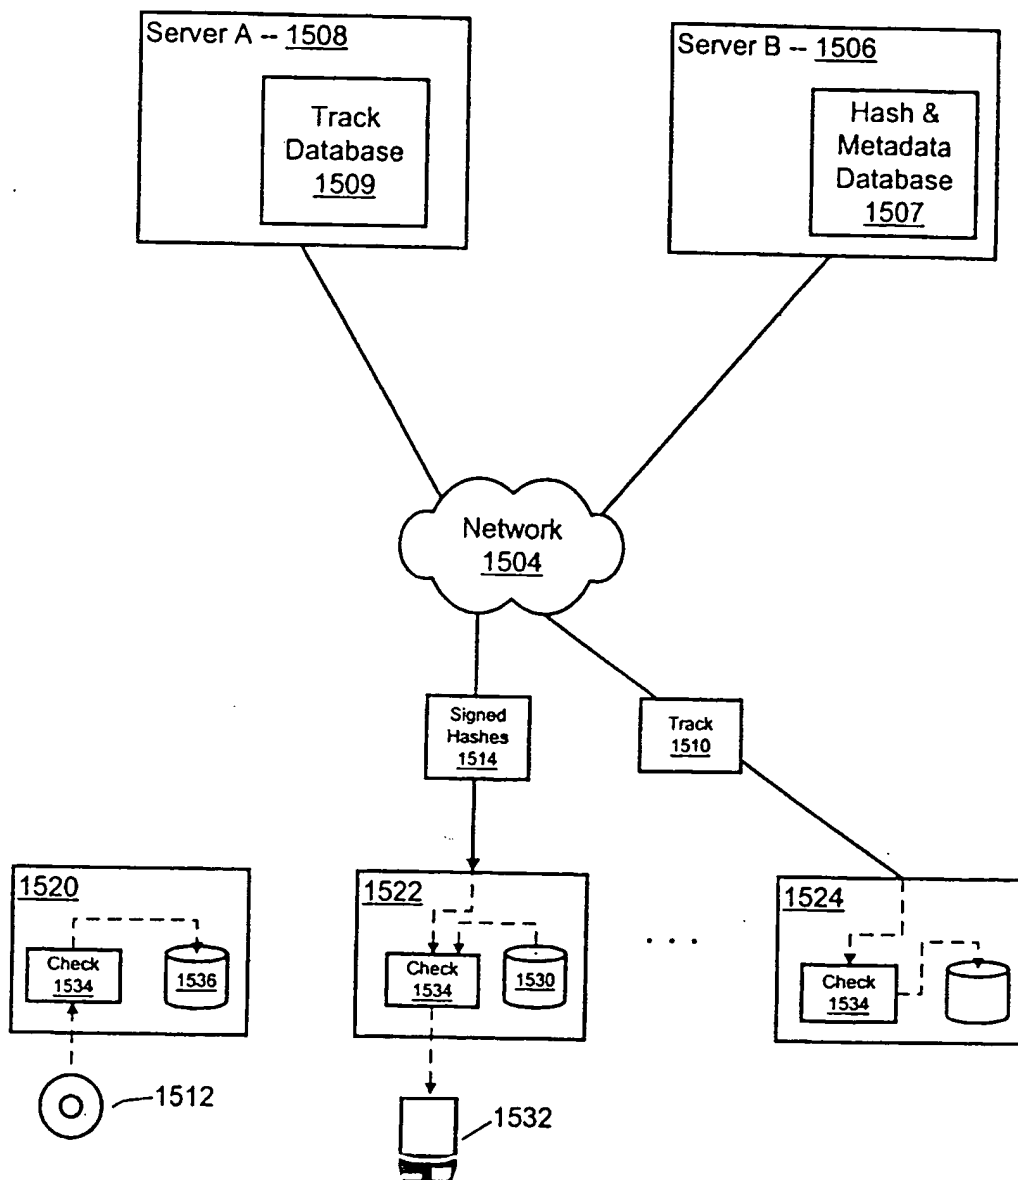


Fig. 15

## PCT/US 00/15671

IPC 7 G11B20/00 H04N5/913 H04N7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B H04N G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

### C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	WO 00 44131 A (TIME WARNER ENTERTAINM CO LP) 27 July 2000 (2000-07-27) the whole document ---	1-46
Y	US 5 659 613 A (RYAN JOHN O ET AL) 19 August 1997 (1997-08-19) the whole document ---	1-46
Y	EP 0 845 758 A (IBM) 3 June 1998 (1998-06-03) abstract column 2, line 46 -column 3, line 51 ---	1-46
A	EP 0 750 423 A (IRDETO BV) 27 December 1996 (1996-12-27) abstract; claims ---	1-46
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "S" document member of the same patent family

Date of the actual completion of the international search

28 September 2000

Date of mailing of the international search report

09/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer \_\_\_\_\_

Foglia, P

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/15671

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>SCHNEIDER M ET AL: "ROBUST CONTENT BASED DIGITAL SIGNATURE FOR IMAGE AUTHENTICATION" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON IMAGE PROCESSING (ICIP),US,NEW YORK, IEEE, 16 September 1996 (1996-09-16), pages 227-230, XP002090178 ISBN: 0-7803-3259-8 page 228, paragraph 5; figures 1-3 ---</p>	1-46
A	<p>EP 0 903 943 A (PIONEER ELECTRONIC CORP) 24 March 1999 (1999-03-24) abstract -----</p>	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/15671

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0044131 A	27-07-2000	NONE	
US 5659613 A	19-08-1997	US 5513260 A	30-04-1996
		US 5739864 A	14-04-1998
		AU 700013 B	17-12-1998
		AU 5869396 A	30-12-1996
		BR 9608560 A	06-07-1999
		CA 2220845 A	19-12-1996
		EP 0830783 A	25-03-1998
		JP 11507160 T	22-06-1999
		WO 9641468 A	19-12-1996
		AU 695097 B	06-08-1998
		AU 2956895 A	25-01-1996
		EP 0767957 A	16-04-1997
		JP 10502479 T	03-03-1998
		WO 9600963 A	11-01-1996
		AU 698870 B	12-11-1998
		AU 3370395 A	14-03-1996
		BR 9508624 A	18-11-1997
		CA 2195942 A	29-02-1996
		CN 1160467 A	24-09-1997
		EP 0777946 A	11-06-1997
		EP 0853433 A	15-07-1998
		JP 10504944 T	12-05-1998
		NZ 292020 A	28-10-1998
		WO 9606503 A	29-02-1996
		US 5668603 A	16-09-1997
EP 0845758 A	03-06-1998	JP 10164549 A	19-06-1998
		CA 2222346 A	28-05-1998
		CN 1184294 A	10-06-1998
		US 6005936 A	21-12-1999
EP 0750423 A	27-12-1996	AU 704421 B	22-04-1999
		AU 5604596 A	09-01-1997
		BR 9602862 A	22-04-1998
		CA 2179223 A	24-12-1996
		CN 1144437 A	05-03-1997
		CZ 9601802 A	11-12-1996
		HU 9601728 A	28-01-1997
		JP 9135435 A	20-05-1997
		NO 962605 A	27-12-1996
		SK 82496 A	03-06-1998
		US 6021197 A	01-02-2000
EP 0903943 A	24-03-1999	JP 11098479 A	09-04-1999